


# LIN Series

## Linear Indirect Lighting

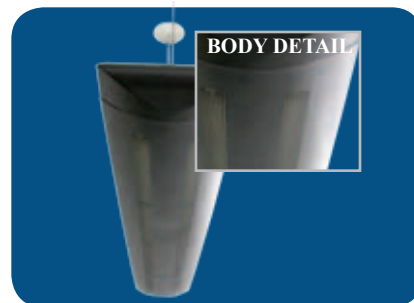

### FEATURES & SPECIFICATIONS

#### INTENDED USE

Indirect linear luminaire is available in 4' and 8' lengths. Low profile 2.1" height and 7.9" wide features a choice of die-cast end caps. (bullnose standard) High efficiency optics include specular aluminum reflector that is designed to provide wide distribution with 100% uplight.

#### SIZE W x L x H in inches (mm)

4ft. - 7" x 48" x 2.0"

8ft. - 7" x 96" x 2.0"

#### LAMP

1, 2, 3, 4, or 6 lamp positions

#### CONSTRUCTION

The die-formed steel housing is available with solid or perforated bottom, with riveted, heavy duty, die-cast aluminum mounting plates. The end caps are die-cast aluminum and are factory installed. Housing and end caps are standard with our exclusive finish featuring an ultra durable white powder top coat. Custom finishes available.

#### ENDCAPS

Die-Cast Aluminum ends - factory installed.  
Bull-Nose style with wing design available.

#### MOUNTING

Mount with 4' adjustable cable (2 for 4' unit or 8' unit, included). Consult factory for longer cables.

#### CONFIGURATION

Individual luminaires come with 2" bullnose" end caps factory-installed and function as a stand alone luminaire. Luminaires can also be combined in long runs by joining together Starters, Runners, and Ends. Starters and Ends have a single "bullnose" end cap factory installed. Standard feed points are located at the Starter. Feed points can be placed at any of the runners to suit building layout or if required to meet electrical loads on longer runs.

#### LISTING


Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.

#### TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.

### ORDERING INFORMATION

Example: LINPF232MVWH-HC301WH

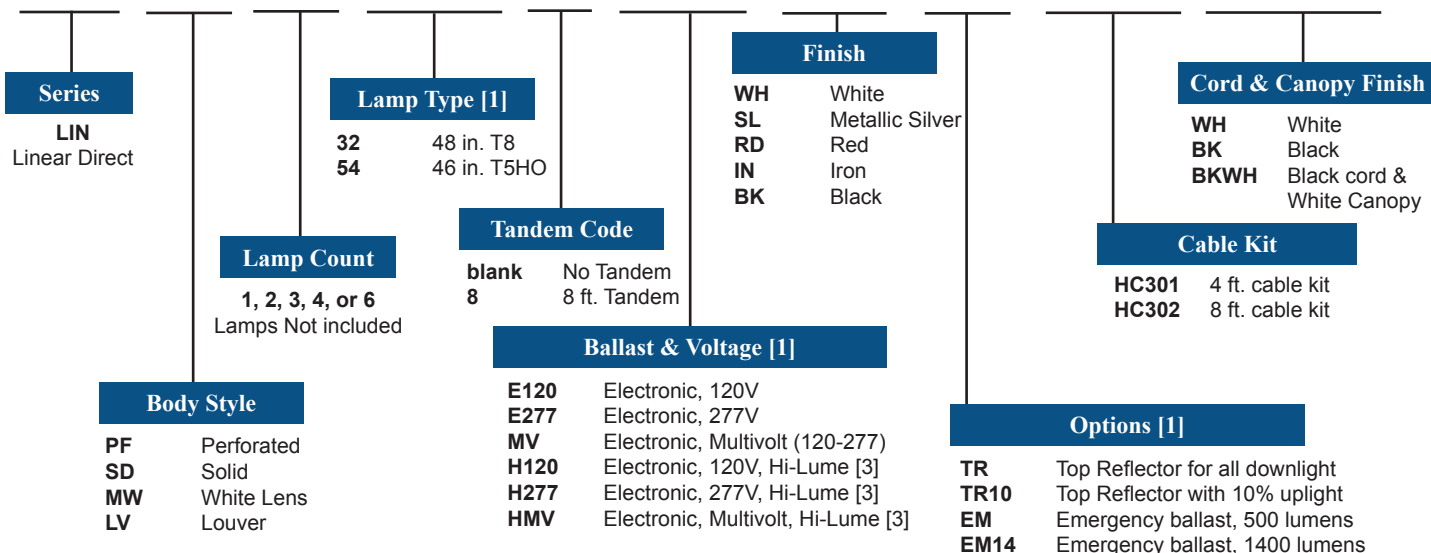

#### Notes

- [1] See end of T02LINEAR for many additional lamps, ballasts, finishes, and options.  
[2] Custom louvers available in any cell configuration. Consult factory for additional information.  
[3] HiLume and LoLume ballasts available for T8 lamps only.


Note: EM14 required for T5HO lamps

Catalog Number:

Notes:

# LIN Series

Linear Indirect Lighting

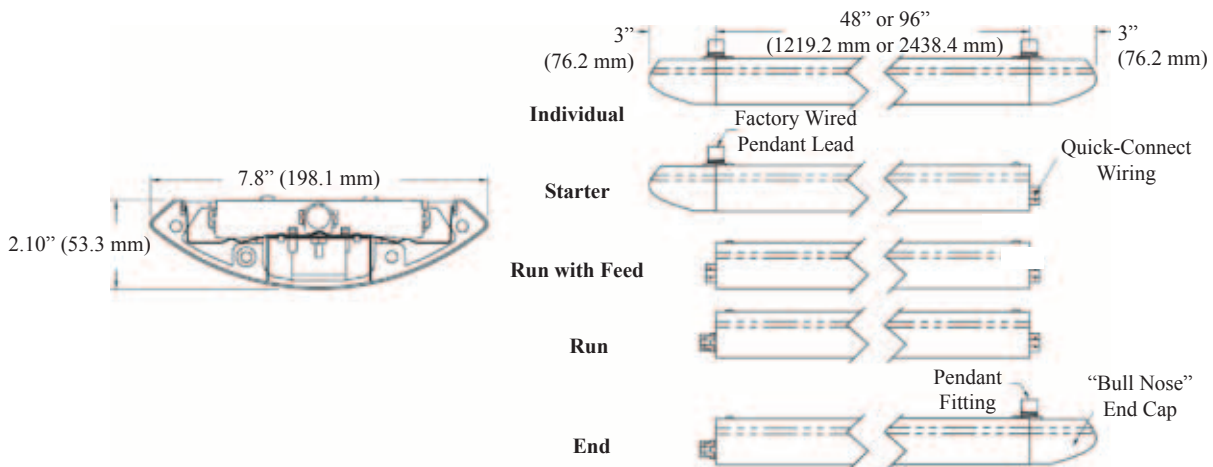

Catalog Number:
Notes: