

153 Series

Surface Mounted Troffer

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, low profile surface mount provides for an almost limitless range of applications in areas where surface modulares (no grid) are required. The shrouded troffer is an economical alternative to the 153 series. It is Ideal for all commercial and industrial buildings requiring

SIZE W x L x H in inches (mm)

- 1x4 - 11.75W x 48.0L x 4.5Dp
- 2x2 - 23.75W x 24.0L x 3.75Dp
- 2x4 - 23.75W x 48.0L x 3.75Dp

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back of housing. Ballast cover or reflector snaps into place; no tools required for ballast access. Lens is held with a hinged steel door frame; frame hinges downward on either side and is held closed by two positive cam latches. Premium, full specular reflectors are available as an option to increase efficiency or modify lighting distribution.

- POST PAINTED POWDER COAT FINISH
- Shallow, low profile design. No external fasteners.
- Clear 0.10thk A12 acrylic lens is standard; many options available



MOUNTING

Direct surface mount.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.

LISTING

Fixture & Driver: UL Listed Driver: Thermally protected, class P, HPF, Non PCB

ORDERING INFORMATION

Example: 153A24S32W3450LDMV40K

STANDARD

153A24	S32W3450L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperature
153A24 - 2x4	S32W3450L 32 System Watts, 3450 Delivered Lumens S48W4800L 48 System Watts, 4800 Delivered Lumens S57W5400L 57 System Watts, 5400 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	35K 3500K 40K 4000K

HIGH OUTPUT

153A24	H36W3500L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperature
153A24 - 2x4	H36W3500L 36 System Watts, 3500 Delivered Lumens H72W7000L 72 System Watts, 7000 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K




*Consult Factory for more options

Catalog Number:
Notes:

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

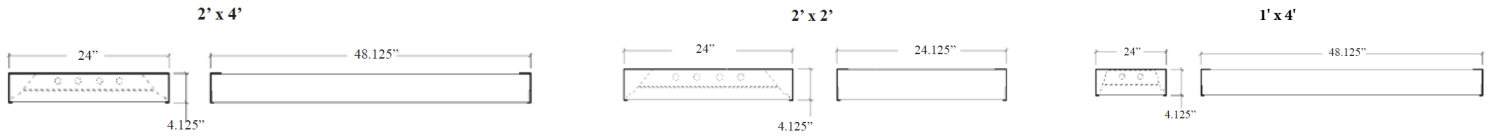

ORDERING INFORMATION

Example: 153A22S24W2400LDMV40K

2x2 STANDARD

153A22

Series

153A22 - 2x2

S24W2400L

Wattage and Lumen

S24W2400L 24 System Watts,
2400 Delivered Lumens
S28W2700L 28 System Watts,
2700 Delivered Lumens

DMV

Driver

DMV 0-10V
MV Multi - Volt
120V-277V

40K

Kelvin Temperature

35K 3500K
40K 4000K

2x2 HIGH OUTPUT

153A22

Series

153A22 - 2x2

H36W3500L

Wattage and Lumen

H36W3500L 36 System Watts,
3500 Delivered Lumens

DMV

Driver

DMV 0-10V
MV Multi - Volt
120V-277V

40K

Kelvin Temperature

30K 3000K
35K 3500K
40K 4000K
50K 5000K

1x4 STANDARD

153A14

Series

153A14 - 1x4

S32W3450L

Wattage and Lumen

S32W3450L 32 System Watts,
3450 Delivered Lumens
S48W4800L 48 System Watts,
4800 Delivered Lumens
S57W5400L 57 System Watts,
5400 Delivered Lumens

DMV

Driver

DMV 0-10V
MV Multi - Volt
120V-277V

40K

Kelvin Temperature

35K 3500K
40K 4000K

Example: 153A14S32W3450LDMV40K

1x4 HIGH OUTPUT

153A14

Series

153A14 - 1x4

H36W3500L

Wattage and Lumen

H36W3500L 36 System Watts,
3500 Delivered Lumens
H72W7000L 72 System Watts,
7000 Delivered Lumens

DMV

Driver

DMV 0-10V
MV Multi - Volt
120V-277V

40K

Kelvin Temperature

30K 3000K
35K 3500K
40K 4000K
50K 5000K

*Consult for more options



Texas Fluorescents
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes: