

LEDT8 Series

LED T8 Lamps

Features and Benefits


One of the fastest growing retrofit segments is changing linear fluorescent lamps to LED T8 lamps. LED T8 lamps provide significant energy savings, excellent life and low maintenance and more focused light control. LED lamps don't use mercury which is important to many. Color temperature and better CRI can also be advantage. These LED lamps are UL and DLC listed that may qualify for local rebates and incentives.



Technical Specifications

- 4 feet T8 tube for F32T8 replacement
- Environmentally friendly with no mercury
- Built-in driver for easy installation
- High lumen efficiency & high CRI
- Five years limited warranty
- DesignLights Consortium qualified
- UL Listed
- 120V or 277V
- 50-60Hz Frequency
- Power Factor > 0.95

Dimensions

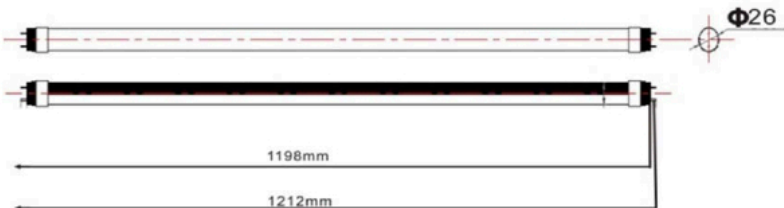

Nominal length: 48" Pin to pin: 47.7"
Base to base: 47.2" $\phi = 1.0"$

Example: **LEDT848L18W40K**

SERIES	SIZE	WATTS/LUMENS	COLOR TEMP
LEDT8 - Single Ended T8 LED Lamps	24L - 24"	For 24L Only 10W - 10 Watts (1200 Lumens)	35K - 3500 Kelvins 40K - 4000 Kelvins 50K - 5000 Kelvins
	48L - 48"	For 48L Only 18W - 18 Watts (2000 Lumens) 22W - 22 Watts (2350 Lumens)	

INSTALLATION

Warning: LED tubes cannot be used with instant start & shunted sockets. Use with bi-pin rapid start sockets only

1. Make sure that the supply voltage (input) is disconnected
2. Remove existing fluorescent lamp
3. Remove electronic ballast, starter, and/or capacitor
4. Rewire the light fixture as shown in the circuit diagram
5. One side will have "AC" to indicate the side for input
6. Insert LED tube into lamp socket

