

202 Series 4ft

Premium 90 Degree Wraparound

INTENDED USE:

Premium grade surface mounted wraparound luminaire with low brightness linear sides. For use in indoor applications where high efficiency, high performance and ease of installation is required. Ideal for retail stores, stairwells, utility areas, schools, offices and public buildings

FEATURES & BENEFITS

- P3 technology - Post Powder Paint
- > 90% reflectivity
- Corrosion and scratch resistant
- Smooth edges for easy handling
- 90 degree sides for easy side wiring
- Nominal 7 3/4" wraps
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in lengths of 48 and 96 inches - (4' and 8' lengths)
- Surface or chain mounted
- Single or continuous row mounting capability
- Every fixture individually tested

MATERIAL

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance P3 - Post Powder Paint. Diffuser hinges from either side in lift and shift manner and is self-centering.



SIZE W x L x H in inches (mm)

-7.75W x 48.0L x 4.5"H

-7.75W x 96.0L x 4.5"H

MOUNTING


Surface or Suspended



ORDERING INFORMATION


Example: 202A48LS32W3450LDMV35K

STANDARD

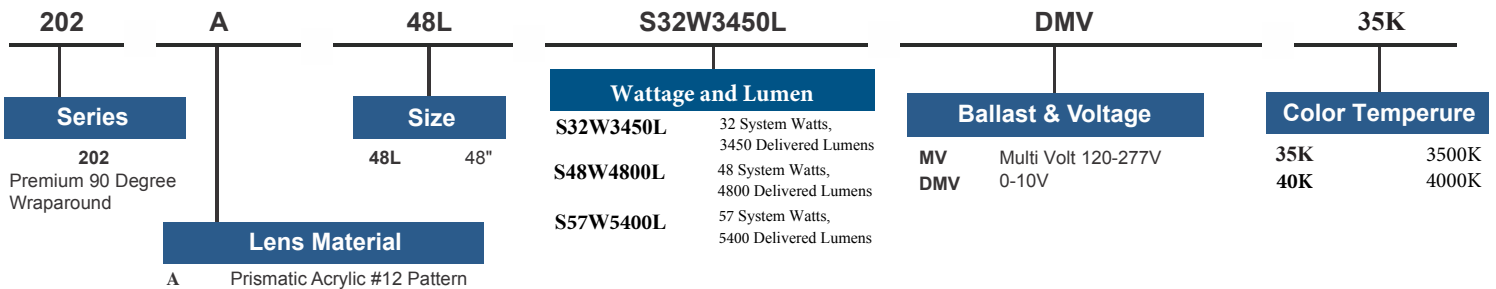

HIGH OUTPUT

Example: 202A48LH72W7000LMV35K

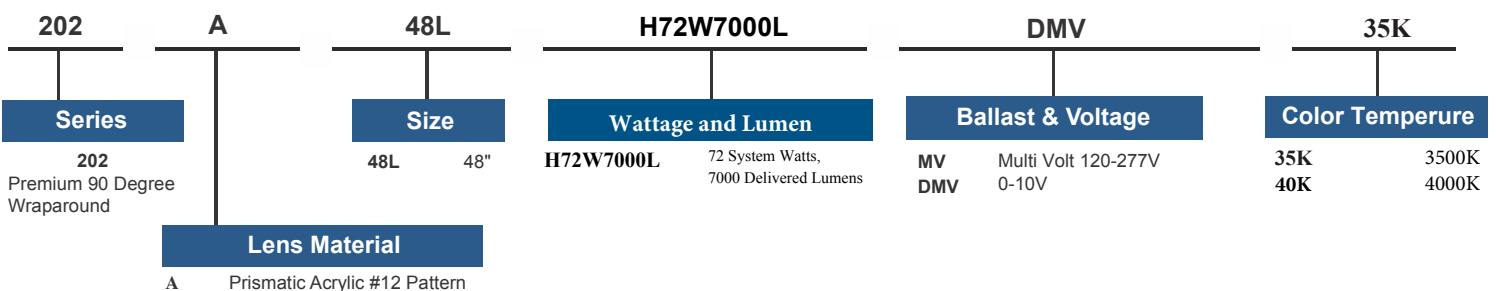


* Consult for more options

Catalog Number:
Notes:

202 Series 8ft

Premium 90 Degree Wraparound



Example: 202A96LS65W7000LDMV35K

ORDERING INFORMATION

STANDARD

202	A	96L	S65W7000L	DMV	35K
Series		Size	Wattage and Lumen	Ballast & Voltage	Color Temperature
202 Premium 90 Degree Wraparound		96L 96"	S65W7000L 65 System Watts, 7000 Delivered Lumens S97W9600L 97 System Watts, 9600 Delivered Lumens	MV Multi Volt 120-277V DMV 0-10V	35K 3500K 40K 4000K
	Lens Material				
	A Prismatic Acrylic #12 Pattern				

HIGH OUTPUT

Example: 202A96LH110W11200LMV35K


202	A	96L	H110W11200L	DMV	35K
Series		Size	Wattage and Lumen	Ballast & Voltage	Color Temperature
202 Premium 90 Degree Wraparound		96L 96"	H110W11200L 110 System Watts, 11200 Delivered Lumens H144W14000L 144 System Watts, 14000 Delivered Lumens	MV Multi Volt 120-277V DMV 0-10V	35K 3500K 40K 4000K
	Lens Material				
	A Prismatic Acrylic #12 Pattern				

* Consult for more options



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

FIXTURE CROSS SECTION VIEW



FIXTURE BACK PLAN VIEW



Catalog Number:

Notes: