


209 Series

LED Shallow Economy Wraparound

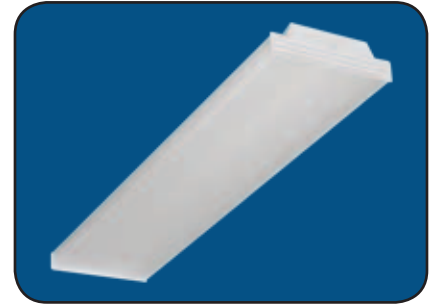

FEATURES & SPECIFICATIONS

INTENDED USE A shallow economy designed wrap around high efficiency luminaire available in either two or four foot lengths. Low initial cost, maintenance free, this series also delivers excellent brightness control.

SIZE W x L x H in inches (mm)

9.375W x 48L x 3.1Dp (4ft.)

CONSTRUCTION

Completely die formed from heavy gauge cold rolled steel. Design embossed ends are locked and secures to the housing. Wireway cover snaps on or off without tools.

MOUNTING

Suitable for individual or continuous run installations. May be surface or pendant mounted.

Typical Options and Accessories

EM - Emergency battery backup, WP - whips.

DIFFUSERS

A crystal clear diffuser extruded from 100% virgin acrylic that will maintain its color under normal conditions, indefinitely. Linear prisms on the interior side walls direct the light ceilingwards, which can then refract back down. The bottom is composed of an evenly spaced pattern of conical prisms yielding low brightness, glarefree diffused light. Diffuser is lift and shift for ease of relamping and cleaning and is capable of hanging down from either side of the housing.

ORDERING INFORMATION

Example: 209A24LF28W2700LDMV40K

209 2ft

STANDARD

209	A	24L	F28W2700L	DMV	40K
Series	Lens	Size	Wattage and Lumen	Driver	Kelvin Temperature
209	A Prismatic Acrylic #12 Pattern	24L 24"	F24W2400L 24 System Watts, 2400 Delivered Lumens F28W2700L 28 System Watts, 2700 Delivered Lumens	DMV 0-10V Dimming * Field installed-Dimming Wire DMVFID 0-10V Dimming * Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT

209	A	24L	H36W3500L	DMV	40K
Series	Lens	Size	Wattage and Lumen	Driver	Kelvin Temperature
209	A Prismatic Acrylic #12 Pattern	24L 24"	H36W3500L 36 System Watts, 3500 Delivered Lumens	DMV 0-10V Dimming * Field installed-Dimming Wire DMVFID 0-10V Dimming * Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

* Consult Factory for more options







Catalog Number:
Notes:

209 4ft

Example: 209A48LF32W3450LDMV40K

STANDARD

209	A	48L	F32W3450L	DMV	40K
Series 209	LENS A Prismatic Acrylic #12 Pattern	Size 48L 48"	Wattage and Lumen	Driver	Kelvin Temperature
		 F23W2650L 23 System Watts, 2650 Delivered Lumens		DMV 0-10V Dimming *Field installed-Dimming Wire	30K 3000K 35K 3500K
		 F32W3450L 32 System Watts, 3450 Delivered Lumens		DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K 4000K 50K 5000K
		 F48W4800L 48 System Watts, 4800 Delivered Lumens			
		 F57W5400L 57 System Watts, 5400 Delivered Lumens			

HIGH OUTPUT

209	A	48L	H72W7000L	DMV	40K
Series 209	LENS A Prismatic Acrylic #12 Pattern	Size 48L 48"	Wattage and Lumen	Driver	Kelvin Temperature
			H72W7000L 72 System Watts, 7000 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire	30K 3000K 35K 3500K
				DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K 4000K 50K 5000K

209 8ft

STANDARD

209	A	96L	F65W7000L	DMV	40K
Series 209	LENS A Prismatic Acrylic #12 Pattern	Size 96L 96"	Wattage and Lumen	Driver	Kelvin Temperature
			F65W7000L 65 System Watts, 7000 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire	30K 3000K 35K 3500K
			F97W9600L 97 System Watts, 9600 Delivered Lumens	DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K 4000K 50K 5000K

DIMENSIONS

209 48L DMV F32W3450L 40K

