

FEATURES & SPECIFICATIONS

INTENDED USE

A linear 4x4 recessed mounted fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. 4x4 Series fixtures can be installed individually or in group patterns. Available with flange or flangeless.

SIZE W x L X H in inches (mm)

4ft. - 4" x 48" x 4"
8ft. - 4" x 96" x 4"

LAMP

1 or 2 lamps

HOUSING

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity.

DIFFUSERS (not included)

Fixture accepts various lenses or louvers. 6' and 8' units have a steel mullion to join two individual diffusers.

MOUNTING

Fixtures can be recessed mounted in grid ceiling tiles or plaster with flange

LISTING


Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.



TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors, Hanging kits, Wire guards, Contact factory for additional options.

ORDERING INFORMATION

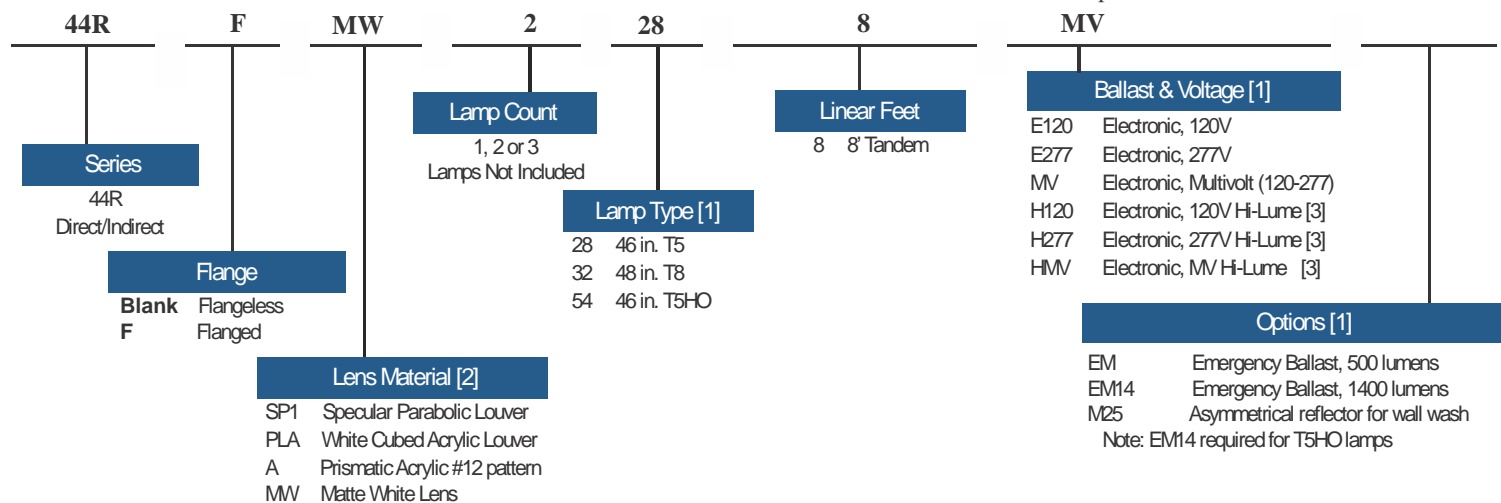

Notes:



[1] See end of T02LINEAR for many additional lamps, ballasts, finishes and options.

[2] Custom louvers available in any cell configuration. Consult factory for additional information.


[3] HiLume and LoLume ballasts available for T8 lamps only.

44 Series


Recessed Version

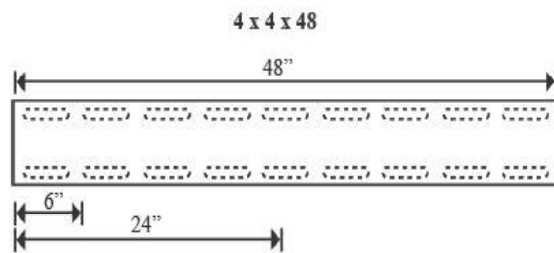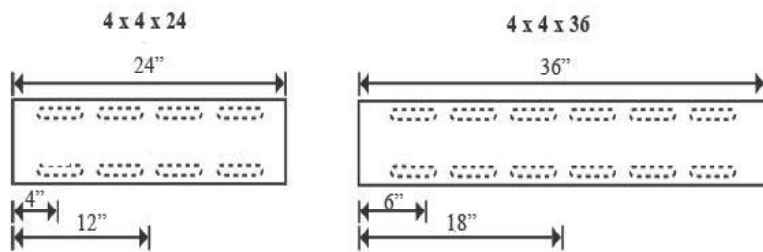

4 x 4 x 72, 6 x 6 x 2/30 Tandem

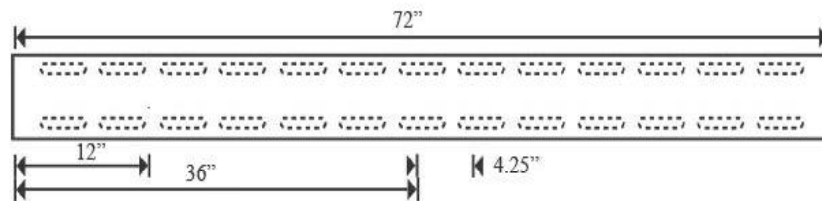

4 x 4 x 96, 4 x 4 x 2/40 Tandem

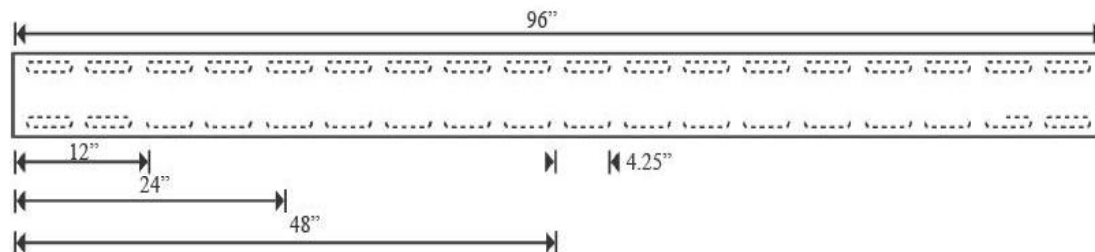

Recessed

