

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, modular linear wall lighting luminaire in a geometric 4 inch shape. For use in indoor applications where individual or continuous lighting is desired for general or perimeter lighting applications. The 44 Wall Series is available in matching surface, pendant (suspended), or recessed. The wall fixture is available in a direct, indirect or combination depending on the application.

SIZE W x L X H in inches

4.0W x 4.0H (See Dimensions)

LAMP

2 lamp position

MATERIALS & FEATURES

Housing is die-formed and welded of heavy gauge cold rolled steel. Knockouts on the ends allow continuous wireway mounting. Fixtures can be hung in various types of recessed ceilings. Leveling lugs are available to support regular recess units.

FINISH

All metal parts are cleaned and treated with a three-stage phosphate coating. These are electrostatically sprayed with a high quality white baking enamel providing a minimum of 87% reflectivity.

DIFFUSERS

Various lenses lie on the side flanges of the fixture. Six and eight foot units have a steel mullion to join two individual diffusers. A baffled louver is available to shield glare.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors, Hanging kits, Wire guards, Contact factory for additional options.



ORDERING INFORMATION

Example: **44WA232MV**

44W	A	232	MV	
Series	Lens Material [2]		Ballast & Voltage [1]	Finishes
44W Wall Direct Light Only 44WI Wall Indirect Only 44WDI Wall Direct w/ Indirect Slots	A Prismatic Acrylic #12 pattern MW Matte White Acrylic BL Baffled Louver SP1 Specular Parabolic Louver 1/2" x 1/2" x 3.8"		MV Electronic, Multivolt (120-277) HMV Electronic, Multivolt, Hi-Lume LMV Electronic, Multivolt, Lo-Lume S Residential 120V Ballast PMV Program Start (120-277) X1 For Single Ended LED Lamps X2 For Double Ended LED Lamps	Blank For Recessed WH Matte White SL Silver BK Matte Black BZ Bronze
	Lamp Count	Lamp Type (1)	Length	Options [1]
	1, 2	17	24 in. T8	EM Emergency Ballast, 500 lumens
	1, 2	25	36 in. T8	EM1 Emergency Ballast, 1400 lumens
	1, 2	32	48 in. T8	M35 Asymmetrical reflector for wall wash
	1, 2	14	24 in. T5 (4)	HC301WH 5' cable kit with White Canopy
	1, 2	21	36 in. T5 (4)	HC302WH 15' cable kit with White Canopy
	1, 2	28	48 in. T5 (4)	Stem kits sold separately
	1, 2	24	24 in. T5HO (4)	
	1, 2	39	36 in. T5HO (4)	
	1, 2	54	48 in. T5HO (4)	


F Flanged for sheetrock installation

Catalog Number:
Notes:


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.


4 x 4 x 96 4 x 4 x 2/32 TANDEM

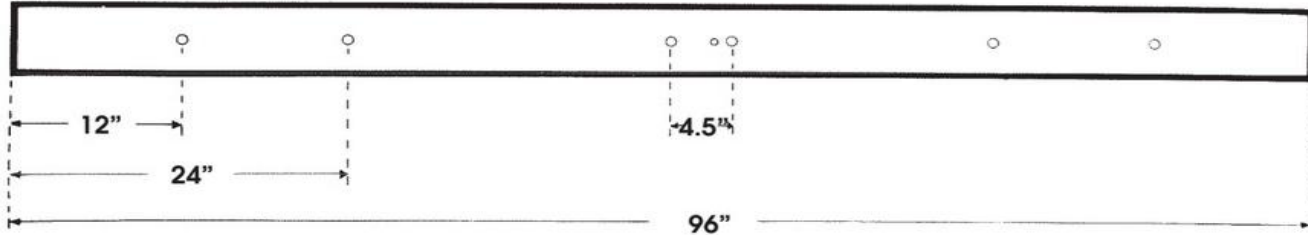


4 x 4 x 72 4 x 4 x 2/25 TANDEM

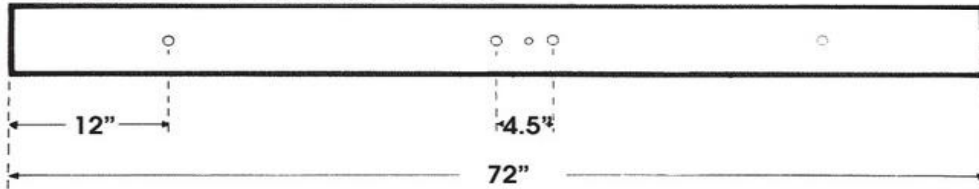


4 x 4 x 48

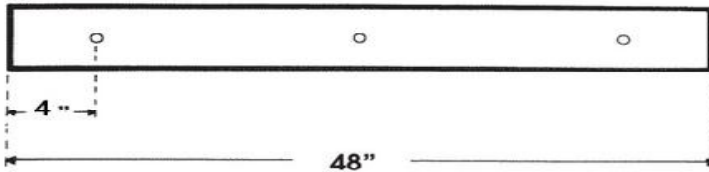

4 x 4 x 36

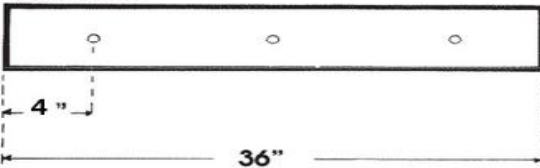

4 x 4 x 24

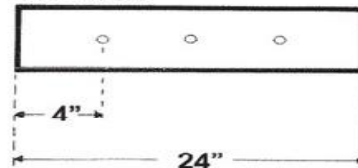

Baffled Louver (BL)