




T E X A S

F L U O R E S C E N T S

# 4RB Series

48in. LED Retrofit Kit

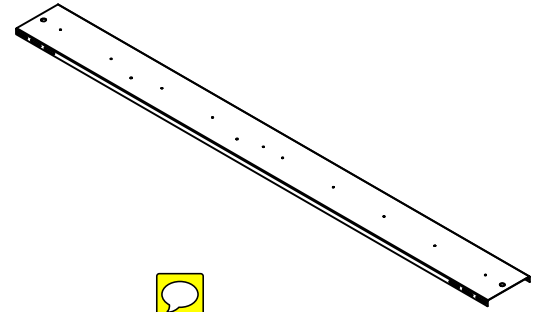

## FEATURES & SPECIFICATIONS

### INTENDED USE

LED retrofit kit, 48 in. long, converts an existing strip to carry excellent light output. Material is die-formed 22 gage steel, with high reflectance baked white enamel finish.

## ORDERING INFORMATION

### STANDARD

Example: 4RB421F48W5650DMV40K

4RB		421		F48W5650L		DMV		40K	
Series		Width		Wattage and Lumen		Driver		Kelvin Temperature	
4RB	48 in.	421	4.25 in.	<b>F24W2800L</b>	24 System Watts, 2800 Delivered Lumens	DMV	0-10V Dimming *Field installed-Dimming Wire	30K	3000K
		501	5.00 in.	<b>F28W3200L</b>	28 System Watts, 3200 Delivered Lumens	DMVFID	0-10V Dimming *Factory installed-Dimming Wire	35K	3500K
				<b>F48W5650L</b>	48 System Watts, 5650 Delivered Lumens			40K	4000K
				<b>F57W6400L</b>	57 System Watts, 6400 Delivered Lumens			50K	5000K

### HIGH OUTPUT

4RB		421		H35W4000L		DMV		40K	
Series		Width		Wattage and Lumen		Driver		Kelvin Temperature	
4RB	48 in.	421	4.25 in.	<b>H35W4000L</b>	35 System Watts, 4000 Delivered Lumens	DMV	0-10V Dimming *Field installed-Dimming Wire	30K	3000K
		501	5.00 in.	<b>H72W8200L</b>	72 System Watts, 8200 Delivered Lumens	DMVFID	0-10V Dimming *Factory installed-Dimming Wire	35K	3500K
								40K	4000K
								50K	5000K

\* Consult for more options

Texas Fluorescents  
2055 Luna Rd. Suite 142 Carrollton, TX 75006  
Phone: 972-247-3171 Fax: 972-247-0200  
www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes:








### DIMENSIONS


All dimensions are inches. Specifications subject to change without notice.

Strip Width

(4.25 or 5.0 in.)

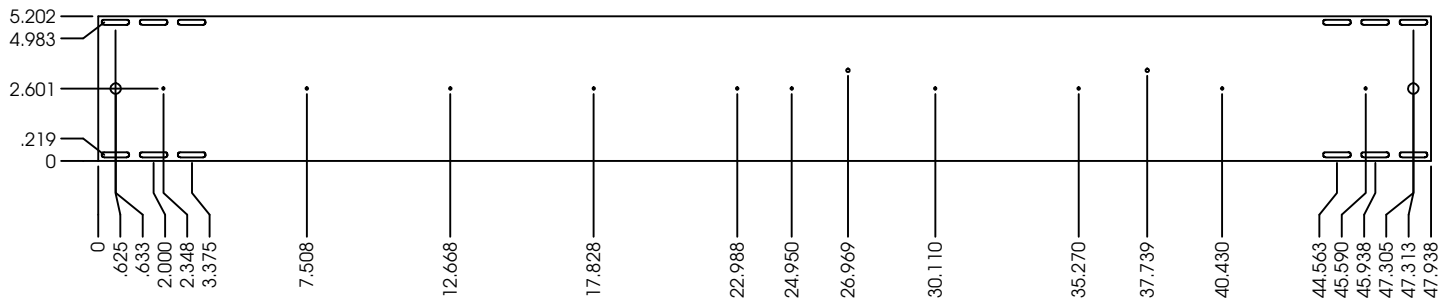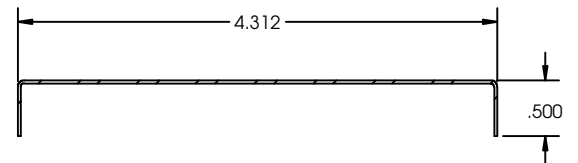

1 Row LED module

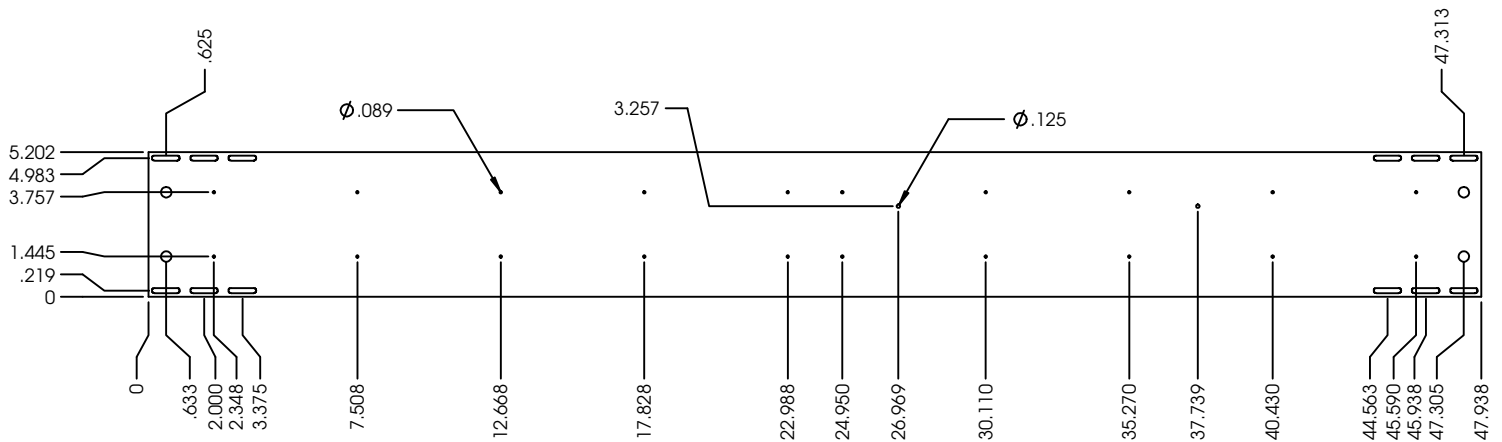

2 Rows LED module