

CRV Series - 2x2

Direct/Indirect, Curve diffuser,
Grid Mount





T E X A S

F L U O R E S C E N T S

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

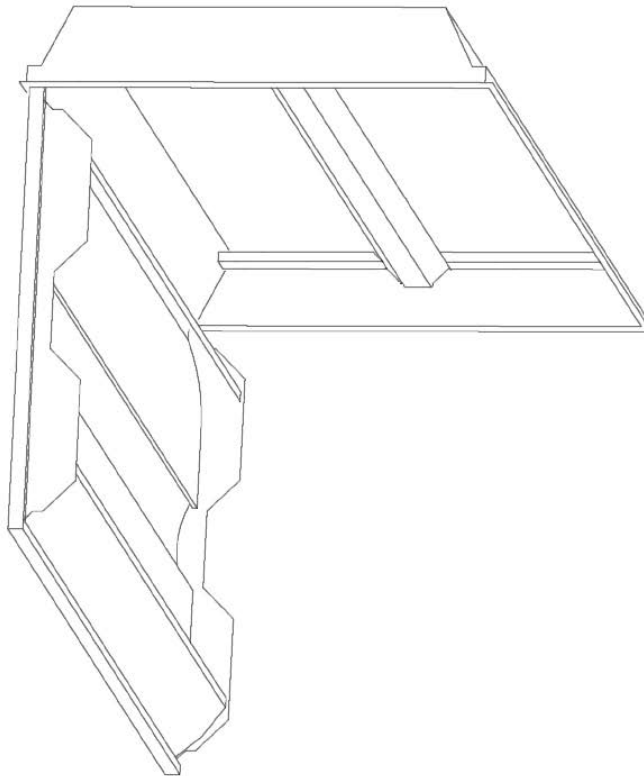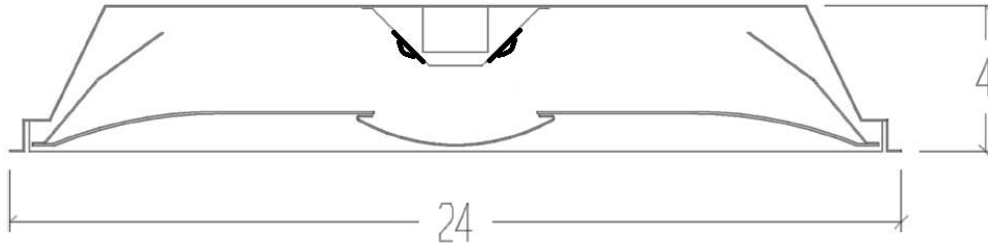

Catalog Number:
Notes:

CRV Series - 2x4

Direct/Indirect, Curve diffuser,
Grid Mount

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, direct / indirect center diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened “sky light” appearance to the modern office environment. Unique dual curved lens with center perforated basket or linear ribbed diffuser provides a luminous housing with excellent visual comfort. Light reaches higher in the space to eliminate the “cave effect.”


SIZE W x L x H in inches

24.0W x 48.0L x 4.0Dp

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing.

- Center section is flush with outer panels, eliminating the dirt and debris from collecting.
- One-piece enclosure is mounted to one piece doorframe
- Direct / indirect mimics “sky light” appearance
- Matte white reflective surfaces for soft, uniform light distribution
- Recessed perforated center diffuser with acrylic overlay.

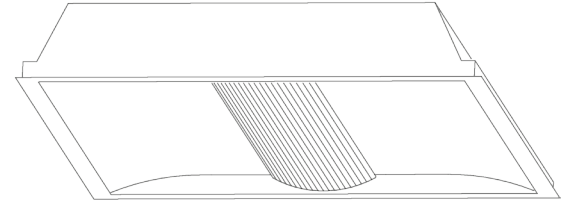

MOUNTING

Recessed inverted T-Bar ceilings. Grid mount.

ORDERING INFORMATION

STANDARD

Example: CRV24PFS32W3463LDMV40K

CRV24	PF	S32W3463L	DMV	40K	
Series		Wattage and Lumen	Driver	Kelvin Temperature	Options
CRV24 2 4 Direct/Indirect, Curve, Grid mount		U54 5685N 54 U uvgo cvvu 5685 gnkxgtgf Nwogpu U6 6 35 N 6 U uvgo cvvu 6 35 gnkxgtgf Nwogpu U77 74 3N 77 U uvgo cvvu 74 3 gnkxgtgf Nwogpu	DMV 0-10V MV Multi - Volt 120V-277V	35K 3500K 40K 4000K	WP 6ft whip, 3/18ga WP10 6ft whip, 4/18ga
Diffusers					
PF Perforated basket with overlay RL Ribbed Linear Lens					

HIGH OUTPUT

Example: CRV24PFH70W7144LDMV40K

CRV24	PF	H70W7144L	DMV	40K	
Series		Wattage and Lumen	Driver	Kelvin Temperature	Options
CRV24 2 4 Direct/Indirect, Curve, Grid mount		92 9366N 92 U uvgo cvvu 9366 gnkxgtgf Nwogpu	DMV 0-10V MV Multi - Volt 120V-277V	30K 1 35K 1 2 1 2 I	IWP 6ft whip, 3/18ga IWP10 6ft whip, 4/18ga I I
Diffusers					
PF Perforated basket with overlay RL Ribbed Linear Lens					

*Consult for more options

Catalog Number:
Notes:

CRV Series - 2x4

Direct/Indirect, Curve diffuser,
Grid Mount






T E X A S

F L U O R E S C E N T S

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

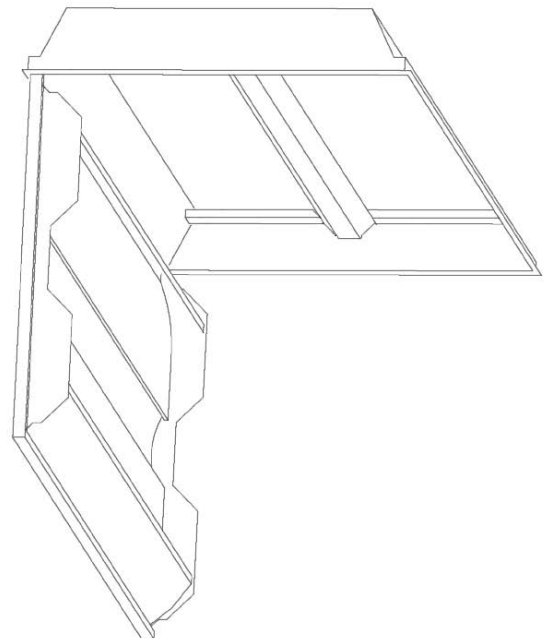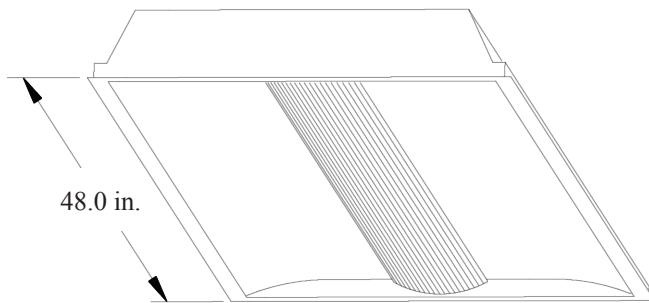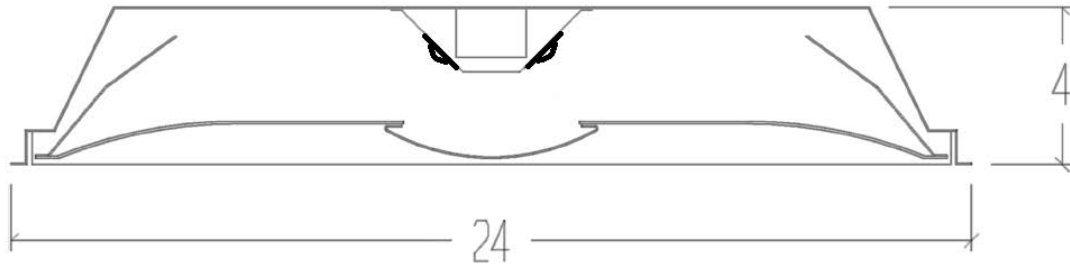

Catalog Number:
Notes: