


DPO 2x2 ft.

Maximum Efficiency
Direct/Indirect, Grid Mount

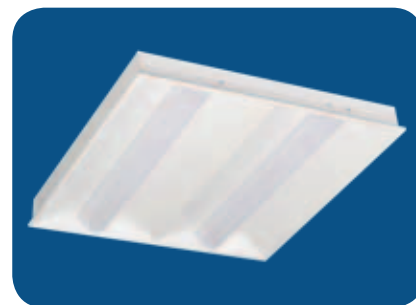

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, very low profile direct / indirect luminaire provides ambient lighting with the MAXIMUM EFFICIENCY required for today's energy conscious offices, medical, and retail environments. The DP series fixtures supply a uniform light level; perfect for a soft wash on all vertical and horizontal surfaces.

SIZE W x L x H in inches (mm)

23.75W x 23.75L x 2.6Dp (600 x 600 x 65)

LAMP

2 Lamp Positions.

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is matte white baked polyester. Wiring knockouts are provided on back of housing. Lenses and reflectors snap into place; no tools required for ballast access. Lenses are fully submerged in fixture body for "clean" ceiling appearance.

- Clear (ribbed) and Opal polycarbonate lenses available
- Extremely Shallow design for low clearance plenums
- Provides soft, uniform ambient lighting.

MOUNTING

Recessed inverted T-Bar ceilings. Grid mount.

LISTING

Fixture and Ballast: UL Listed.


Ballast: Thermally protected, class P, HPF, Non PCB.

TYPICAL OPTIONS AND ACCESSORIES

Dimming, emergency ballasts, whips, and frame kits. See options page at the end of the T02Grid section, or contact factory for more details.

ORDERING INFORMATION

Example: **DPO224MV**

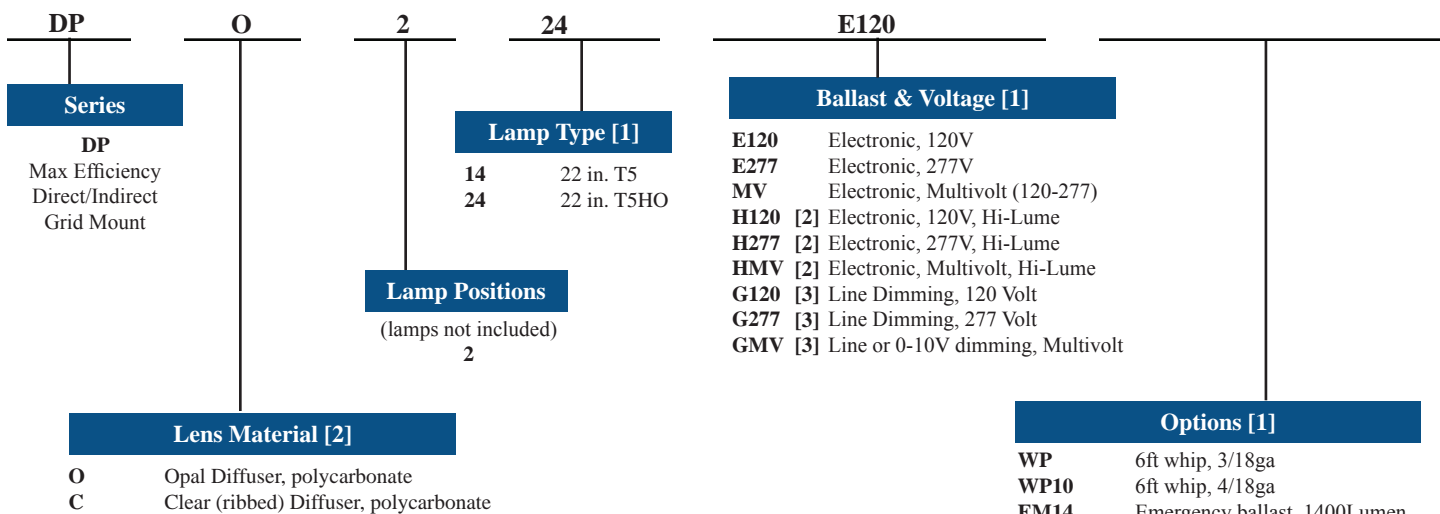

EM14 ballast required for T5 & T5HO lamps

Notes:

[1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.

[2] HiLume and multivolt dimming ballasts available for T8 lamps only.


[3] Dimming ballasts available for T8 & T5HO lamps only.

Catalog Number:

Notes:


DPO 2x2 ft.

Maximum Efficiency
Direct/Indirect, Grid Mount

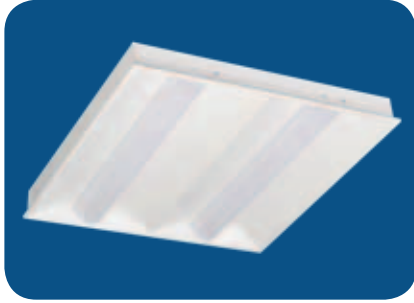

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

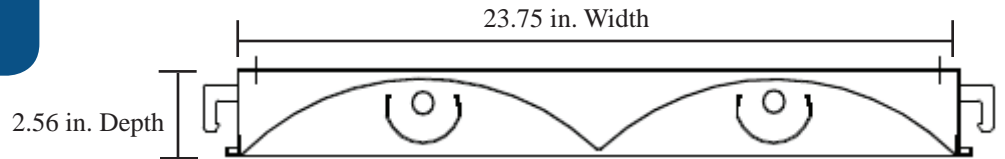

PHOTOMETRICS

Calculated using the zonal cavity method in accordance with IESNA LM41 procedure. Lamp configurations shown are typical. Photometric data on these and other configurations available upon request.

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
		RCR			Zonal cavity coefficients			DPC214	
0	1.04	1.03	1.03	1.01	1.01	1.00	0.96	0.97	0.99
1	0.95	0.90	0.86	0.88	0.84	0.81	0.84	0.81	0.78
2	0.86	0.78	0.71	0.76	0.70	0.65	0.73	0.68	0.64
3	0.78	0.67	0.60	0.66	0.59	0.53	0.63	0.57	0.52
4	0.71	0.59	0.51	0.58	0.51	0.45	0.56	0.49	0.44
5	0.65	0.52	0.44	0.51	0.43	0.38	0.49	0.42	0.37
6	0.59	0.46	0.38	0.45	0.38	0.32	0.44	0.37	0.32
7	0.55	0.42	0.34	0.41	0.33	0.28	0.40	0.33	0.28
8	0.51	0.38	0.30	0.37	0.30	0.24	0.36	0.29	0.24
9	0.47	0.34	0.27	0.34	0.26	0.22	0.33	0.26	0.21
10	0.44	0.31	0.24	0.31	0.24	0.19	0.30	0.23	0.19


Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
		RCR			Zonal cavity coefficients			DPC224	
0	0.98	0.93	0.90	0.91	0.88	0.85	0.87	0.84	0.82
1	0.97	0.92	0.88	0.90	0.86	0.83	0.86	0.83	0.80
2	0.88	0.80	0.73	0.78	0.72	0.67	0.75	0.70	0.65
3	0.80	0.69	0.61	0.68	0.60	0.55	0.65	0.59	0.54
4	0.73	0.61	0.52	0.60	0.52	0.46	0.57	0.51	0.45
5	0.66	0.54	0.45	0.53	0.44	0.39	0.51	0.43	0.38
6	0.60	0.47	0.39	0.47	0.39	0.33	0.45	0.38	0.33
7	0.56	0.43	0.34	0.42	0.34	0.29	0.41	0.33	0.28
8	0.52	0.39	0.31	0.38	0.30	0.25	0.37	0.30	0.25
9	0.48	0.35	0.27	0.34	0.27	0.22	0.33	0.27	0.22
10	0.45	0.32	0.24	0.31	0.24	0.20	0.30	0.24	0.19

Catalog Number:
Notes:



DPO 2x4 ft.

Maximum Efficiency
Direct/Indirect, Grid Mount

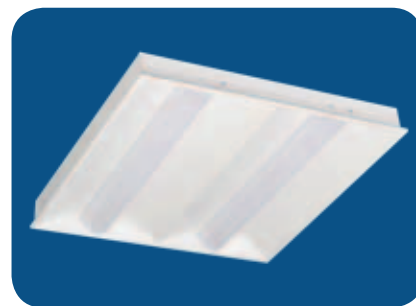

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, very low profile direct / indirect luminaire provides ambient lighting with the MAXIMUM EFFICIENCY required for today's energy conscious offices, medical, and retail environments. The DP series fixtures supply a uniform light level; perfect for a soft wash on all vertical and horizontal surfaces.

SIZE W x L x H in inches (mm)

23.75W x 47.75L x 2.6Dp (600 x 1210 x 65)

LAMP

2 Lamp Positions

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is matte white baked polyester. Wiring knockouts are provided on back of housing. Lenses and reflectors snap into place; no tools required for ballast access. Lenses are fully submerged in fixture body for "clean" ceiling appearance.

- Clear (ribbed) and Opal polycarbonate lenses available
- Extremely Shallow design for low clearance plenums
- Provides soft, uniform ambient lighting.

MOUNTING

Recessed inverted T-Bar ceilings. Grid mount.

WEIGHT

Fixture weighs 20.0 lbs.

LISTING

Fixture and Ballast: UL Listed.


Ballast: Thermally protected, class P, HPF, Non PCB.

TYPICAL OPTIONS AND ACCESSORIES

Dimming, emergency ballasts, whips, and frame kits. See options page at the end of the T02Grid section, or contact factory for more details.

ORDERING INFORMATION

Example: **DPO228MV**

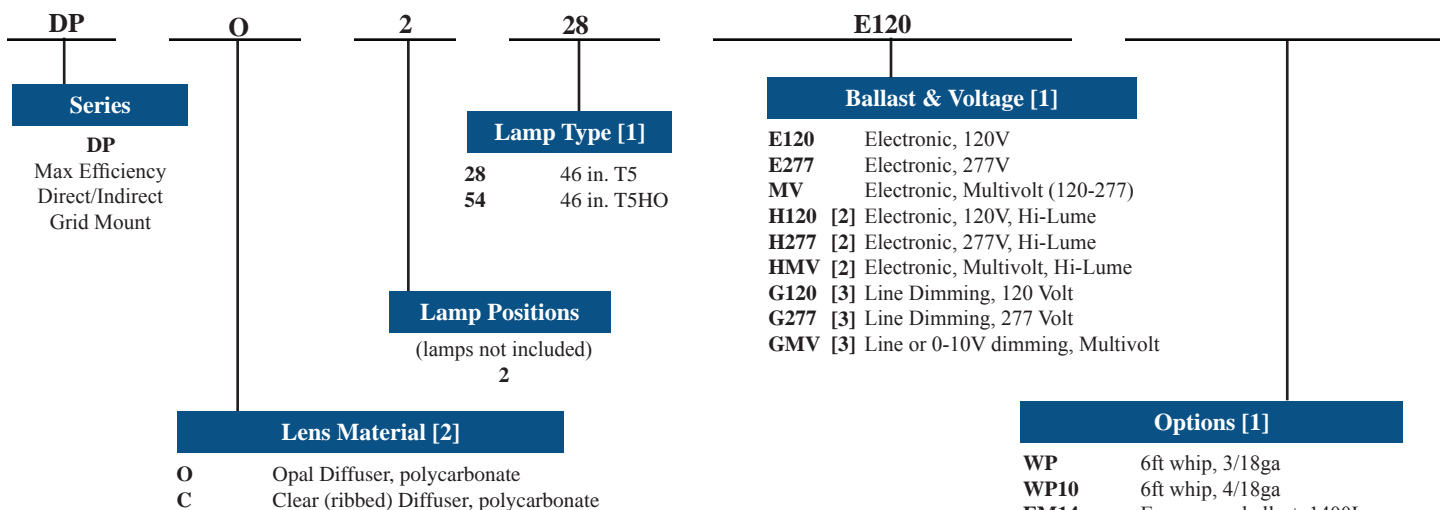

EM14 ballast required for T5 & T5HO lamps


Notes:

- [1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.
 [2] HiLume and multivolt dimming ballasts available for T8 lamps only.
 [3] Dimming ballasts available for T8 & T5HO lamps only.

Catalog Number:
Notes:


DPO 2x4 ft.

Maximum Efficiency
Direct/Indirect, Grid Mount

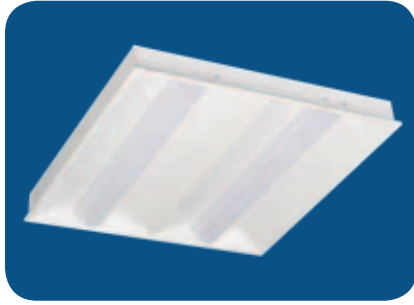

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

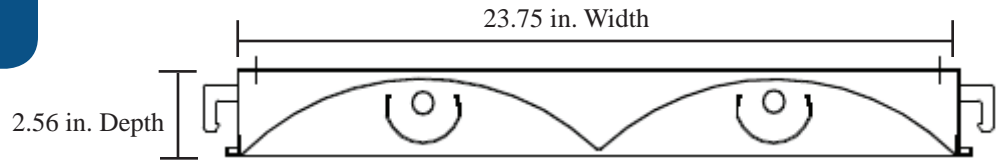

PHOTOMETRICS

Calculated using the zonal cavity method in accordance with IESNA LM41 procedure. Lamp configurations shown are typical. Photometric data on these and other configurations available upon request.

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
RCR Zonal cavity coefficients DPC228									
0	0.95	0.90	0.86	0.88	0.84	0.81	0.85	0.81	0.79
1	0.86	0.78	0.71	0.76	0.70	0.65	0.73	0.68	0.63
2	0.78	0.67	0.59	0.66	0.58	0.52	0.63	0.57	0.57
3	0.71	0.59	0.50	0.57	0.49	0.43	0.55	0.48	0.43
4	0.64	0.51	0.43	0.50	0.42	0.36	0.48	0.41	0.36
5	0.58	0.45	0.37	0.44	0.36	0.31	0.43	0.36	0.30
6	0.54	0.41	0.32	0.40	0.32	0.26	0.39	0.31	0.26
7	0.50	0.37	0.29	0.36	0.28	0.23	0.35	0.28	0.23
8	0.46	0.33	0.26	0.33	0.25	0.20	0.32	0.25	0.20
9	0.43	0.30	0.23	0.30	0.23	0.18	0.29	0.22	0.18
10	0.47	0.35	0.29	0.45	0.35	0.29	0.34	0.28	0.24

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
RCR Zonal cavity coefficients DPC254									
0	1.05	1.04	1.04	1.02	1.02	1.01	0.97	0.98	0.97
1	0.95	0.9	0.86	0.88	0.84	0.81	0.85	0.81	0.79
2	0.86	0.78	0.71	0.76	0.7	0.65	0.73	0.68	0.63
3	0.78	0.67	0.59	0.66	0.58	0.52	0.63	0.57	0.51
4	0.71	0.59	0.5	0.57	0.49	0.43	0.55	0.48	0.43
5	0.64	0.51	0.43	0.5	0.42	0.36	0.48	0.41	0.36
6	0.58	0.45	0.37	0.44	0.36	0.31	0.43	0.36	0.3
7	0.54	0.41	0.32	0.4	0.32	0.26	0.39	0.31	0.26
8	0.5	0.37	0.29	0.36	0.28	0.23	0.35	0.28	0.23
9	0.46	0.33	0.26	0.33	0.25	0.2	0.32	0.25	0.2
10	0.43	0.3	0.23	0.3	0.23	0.18	0.29	0.22	0.18

Catalog Number:
Notes: