



T E X A S

F L U O R E S C E N T S

FHB Series

HiBay, Baffle



FEATURES & SPECIFICATIONS

INTENDED USE

The FHB series is offered with baffles to cut glare, is perfect for retail use, and is dressed for applications requiring aesthetic appeal. Premium full specular white reflectors are standard for high efficiency lighting; white reflectors may be specified for wider distributions. Mounting options include direct surface, chain, or pendant wire, but is not suitable for stem mount.

MOUNTING

Surface mount or chain hung. See end of chapter T02Strip for accessory mount kits.

SIZE W x L x H in inches (mm)

4ft. - 11.25W x 48L x 4.25H

8ft. - 11.25W x 96L x 4.25H

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Baffle is hinged and latched, and may be hinged from either side. Premium full specular enhanced white reflectors are available.

ORDERING INFORMATION

STANDARD

Example: FHBL48LS57W6400LW30DMV40K

FHB	L	48L	S57W6400L	W30	DMV	40K
Series	Baffle	Size	Wattage and Lumen	Reflector	Driver	Color Temperature
FHB Wide Body Strip	L Baffle included X No Baffle	48L 48"	S32W4050L 32 System Watts, 4050 Delivered Lumens S48W5650L 48 System Watts, 5650 Delivered Lumens S57W6400L 57 System Watts, 6400 Delivered Lumens	W30 White Steel Reflector	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K
						Options
						CS 5-15P 120V 8ft. Cord & Plug CS12 L7-15P 277V 8ft. Cord & Plug CS08 8ft. Cord, No Plug WP 6 ft. 3 wire, Whip WP10 6 ft. 4 wire, Whip

HIGH OUTPUT

Example: FHBL48LH72W8200LW30DMV40K

FHB	L	48L	H72W8200L	W30	DMV	40K
Series	Baffle	Size	Wattage and Lumen	Reflector	Driver	Color Temperature
FHB Wide Body Strip	L Baffle included X No Baffle	48L 48"	H72W8200L 72 System Watts, 8200 Delivered Lumens	W30 White Steel Reflector	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K
						Options
						CS 5-15P 120V 8ft. Cord & Plug CS12 L7-15P 277V 8ft. Cord & Plug CS08 8ft. Cord, No Plug WP 6 ft. 3 wire, Whip WP10 6 ft. 4 wire, Whip


*Consult Factory for custom colors
Different options on wattage and lumen.

Texas Fluorescents
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes:

FHB Series

HiBay, Baffle

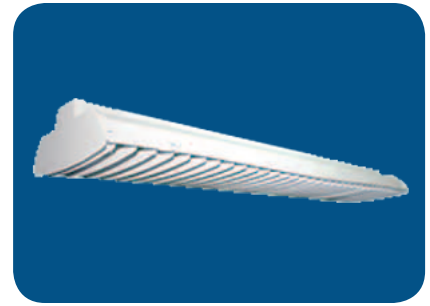

ORDERING INFORMATION

STANDARD

Example: FHBL96LS97W11300LW30DMV40K

FHB	L	96L	S97W11300L	W30	DMV	40K	
Series		Size	Wattage and Lumen		Driver	Color Temperature	
FHB Wide Body Strip		96L 96"	S97W11300L 97 System Watts, 11300 Delivered Lumens S114W12800L 114 System Watts, 12800 Delivered Lumens		DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K	
	Baffle			Reflector			Options
	L Baffle included X No Baffle			W30 White Steel Reflector			CS 5-15P 120V 8ft. Cord & Plug CS12 L7-15P 277V 8ft. Cord & Plug CS08 8ft. Cord, No Plug WP 6 ft. 3 wire, Whip WP10 6 ft. 4 wire, Whip

HIGH OUTPUT

Example: FHBL48LH144W16450LW30DMV40K

FHB	L	96L	H144W16450L	W30	DMV	40K	
Series		Size	Wattage and Lumen		Driver	Color Temperature	
FHB Wide Body Strip		96L 96"	H144W16450L 144 System Watts, 16450 Delivered Lumens		DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K	
	Baffle			Reflector			Options
	L Baffle included X No Baffle			W30 White Steel Reflector			CS 5-15P 120V 8ft. Cord & Plug CS12 L7-15P 277V 8ft. Cord & Plug CS08 8ft. Cord, No Plug WP 6 ft. 3 wire, Whip WP10 6 ft. 4 wire, Whip

* Consult Factory for custom colors and options on wattage and lumen.

Catalog Number:
Notes: