

# HOTWD Series

Coordinated design in surface fluorescent  
close-to-ceiling wall and vanity

**HOUSING**

Die-formed Cold Rolled Steel

**SHADE**

Acrylic Diffuser/Frosted Glass

**BALLAST**

120V 60 Hz, Electronic Ballast

**LAMP**

(2) 13 Watt Plug-In or (2) 18 Watt Plug-In Fluorescents

**EFFICACY**


Meet California 2005 Title 24 Standard

**CERTIFICATION**

UL, cUL Listed, Energy Star Listed


**SIZE**

9.25W x 10.5L x 4.0H

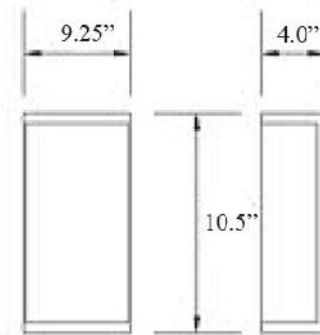

**ORDERING INFORMATION**

**Example: HOTWD 213SSNLN**

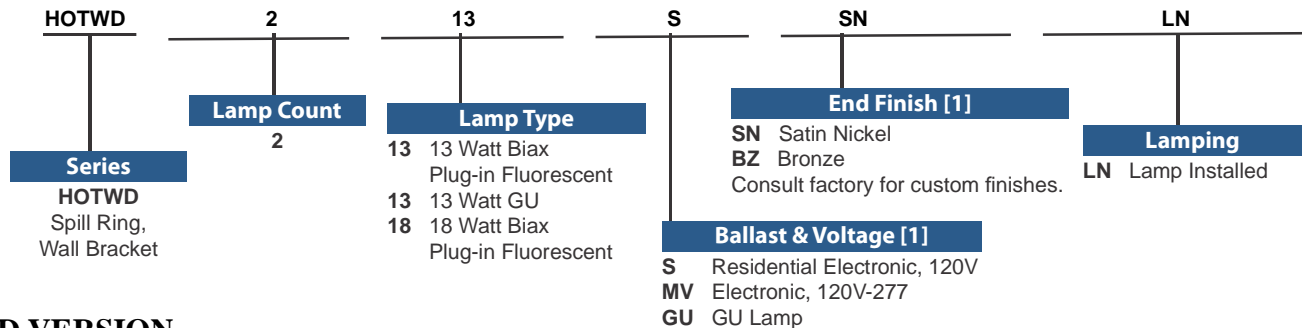

**LED VERSION**

- LED Driver: Constant Current Type
- UL Listed
- CRI >80
- Cool White, 5000K available upon request

Item #	Size (LxWxEXT)	Lamping
HOTWDL24W1200L30K	9" x 4" x 10.5"	24W, 1200 Lumens, 3000K

NOTE: Specifications and dimensions subject to change without notice. Consult your Texas Fluorescent Lighting Representative for availability and ordering information.

Texas Fluorescents  
2055 Luna Rd. Suite 142 Carrollton, TX 75006  
Phone: 972-247-3171 Fax: 972-247-0200  
www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes: