

### UL File Numbers

UL and C-UL Recognized  
UL FILE # E 193999

### Available Versions


- 901060010-Standard Version
- 901060005-Bottom Feed Version
- 901060012DL-With Dimming Loop
- 901060012PM-With Potentiometer
- 901060032-With Grounding Wire

### Mechanical and Thermal


Dimensions 20mm x 33 mm x 53 mm  
 Weight 3 ounces  
 Lead wire length 6"  
 $\Delta T$  40°C  
 Max. case temp. 90°C  
 Max. ambient temp. 50°C  
 Output wire – Blue – 14AWG 200°C  
 Input wire – White/Black – 18AWG 150°C  
 Aluminum casing

### Electrical


Maximum load 60W  
 Minimum load w/o dimmer 10W  
 Minimum load with dimmer 20W  
 Input 120V 60Hz  
 Output at max. load 11.75V 40kHz  
 Input current at max. load 0.5A  
 Output current at max. load 5A  
 Power factor min. 0.95  
 Dimmable

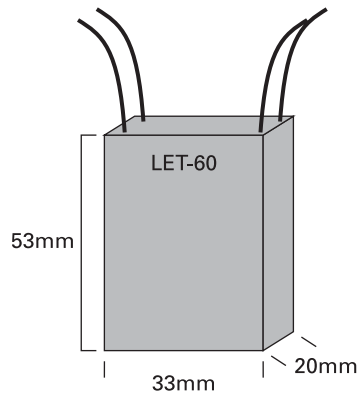

### Output Voltage vs. Load at 120V

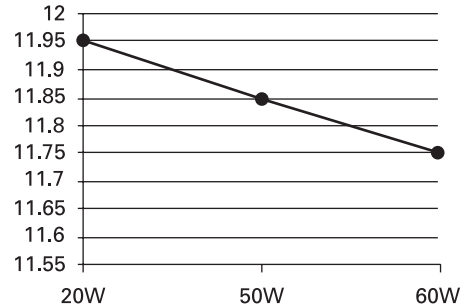

### Output vs. Input at Max. Load

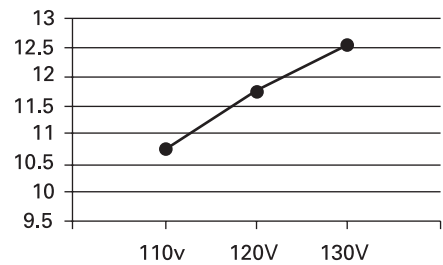

### Short Circuit and Thermal Protection

Electronic internal resettable protection. Patented auto heat regulation that also automatically acts as overload protection. Auto-Reset thermal cut-off @ 125C.