

UL File Numbers

UL and C-UL Recognized
UL FILE # E 164062

Available Versions

901075000-Standard Version
901075005-Bottom Feed Version
901075030-With Grounding Wire
901075070-With Double Sided Tape


Mechanical and Thermal

Dimensions 20mm x 33 mm x 53 mm
Weight 3 ounces
Lead wire length 6"
 ΔT 40°C
Max. ambient temp. 50°C
Output wire – Blue – 14AWG 200°C
Input wire – White/Black – 18AWG 150°C
Aluminum casing


Electrical

Maximum load 75W
Minimum load w/o dimmer 10W
Minimum load with dimmer 20W
Input 120V 60Hz
Output at max. load 11.7V 40kHz
Input current at max. load 0.635A
Output current at max. load 6.35A
Power factor min. 0.95
Dimmable

Output Voltage vs. Load at 120V

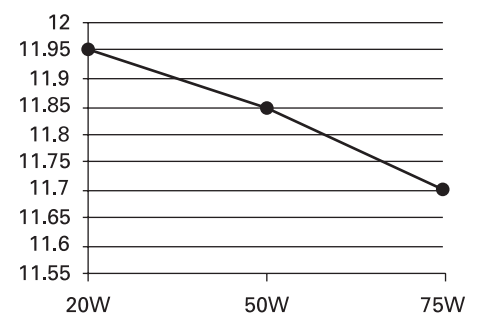

Output vs. Input at Max. Load

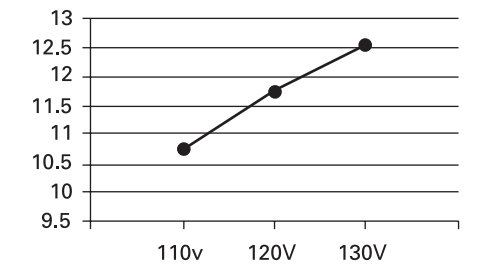

Short Circuit and Thermal Protection

Electronic internal resettable protection. Patent pending auto heat regulation that also automatically acts as overload protection. Thermal auto-reset 125C switch.

