


LIN Series

Linear Indirect Lighting

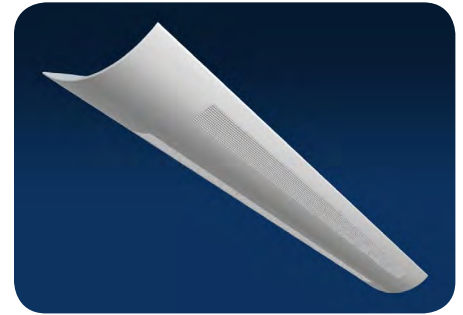

FEATURES & SPECIFICATIONS

INTENDED USE

Indirect linear luminaire is available in 4' and 8' lengths. Low profile 2.1" height and 7.0" wide features a choice of die-cast end caps. (bullnose standard). High efficiency optics include specular aluminum reflector that is designed to provide wide distribution with 100% uplight.

SIZE W x L x H in inches

4 ft. - 7" x 48" x 2.0"

8 ft. - 7" x 96" x 2.0"

LAMP

1, 2 or 3 Lamp Positions in cross section. (3 on T5 only)

CONSTRUCTION

The die-formed steel housing is available with solid or perforated bottom, with riveted, heavy duty, die-cast aluminum mounting plates. The end caps are die-cast aluminum and factory installed. Housing and end caps are standard with our exclusive finish featuring an ultra durable white powder top coat. Custom finishes available.

END CAPS

Die-cast aluminum ends - factory installed.

Bull-nose style with wing design available.

CONFIGURATION

Individual luminaires come with 2" bullnose end caps factory installed and function as a stand alone luminaire. Luminaires can also be combined in long runs by joining together Starters, Runners and Ends. Starters and Ends have a single "bullnose" end cap factory installed. Standard feed points are located at the Starter. Feed points can be placed at any of the runners to suit building layout or if required to meet electrical loads on longer runs.

LISTING

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, cord sets, whips, occupancy sensors, hanging kits, wire guards. Contact factory for additional options.

ORDERING INFORMATION

Example: LINPF2328MVWHHC301WH

LIN	PF	232	8	MV	WH	HC301	WH
Series		Lamp Count Lamp Type & Tandem Code [2]				Cable Kit	Cord/Canopy Finish
LIN Linear Direct		1 or 2	32 48 in.T8 8 8ft. Tandem (Double lamp count) [4]			HC301 4 ft. cable kit HC302 8 ft. cable kit	WH White BK Black BKWH Black cord White canopy
	Body Style	1, 2 or 3	28 46 in.T5 8 8ft. Tandem (Double lamp count) [4]				
	PF Perforated SD Solid MW White Lens LV Louver*	1, 2 or 3	54 46 in.T5HO 8 8ft. Tandem (Double lamp count) [4]	Ballast & Voltage [1]	Finish		Options
				MV Electronic, Multivolt (120-277V) HMV Electronic, Multivolt, Hi-Lume [3] DMV Electronic, 0-10V Dimming	WH White SL Metallic Silver RD Red IN Iron BK Black		EM Emergency ballast 500 lumens EM14 Emergency ballast 1400 lumens Note: EM14 for T5HO lamps
	* LV (Louver) only works with T5 lamps * Provides 40% downlight						

Catalog Number:
Notes:

