

MPUFF Series

Mini Puff Fixture



FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in kitchens, playrooms, utility room and closets. This is the newest surface fluorescent with a half moon lens and the best light distribution. Available with Electronic Ballast Featuring: instant start, no annoying hum, 5 year warranty on ballasts, consumes 20% less energy.

SIZE W x L x H in inches (mm)

2ft. - 9.0W x 24.0L x 4.0Dp

4ft. - 9.0W x 48.0L x 4.0Dp

LAMP

2 lamp positions

ELECTRICAL

High power factor, U.L. approved ETL-CBM internally fused ballasts are standard on all 40 watt Rapid Start fixtures. Fixtures are wired for 110-120 volt, 60 cycle A.C. operation. Ballasts and wiring for other voltages and applications will be supplied when requested to meet specification. Fixtures bear U.L. labels.

DIFFUSER

Specially formed plastic diffuser produces flawless light source with even illumination on all sides, and no distract-

MOUNTING

May be surface or pendant mounted.

LISTING


Fixture and Ballast: UL Listed. Ballast: Thermally protected, class P, HPF, Non PCB.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, whips, and lenses. See options page at the end of the T02SURF section, or contact factory for more details.

ORDERING INFORMATION

Example: MPUF232S

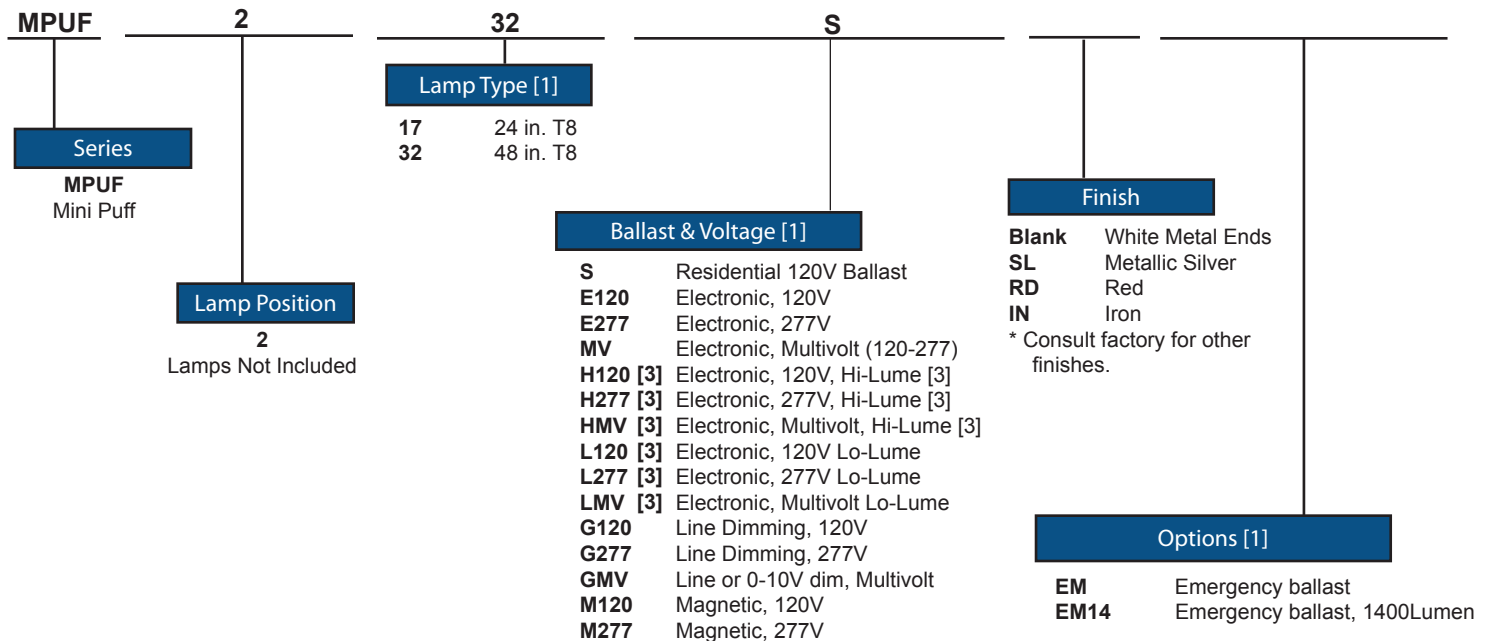

EM14 ballast required for T5, TT5 & T5HO

Notes

[1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.

[2] HiLume and multivolt dimming ballasts available for T8 lamps only.

[3] Dimming ballasts available for T8 lamps only.

Catalog Number:

Notes: