



T E X A S

F L U O R E S C E N T S

# PUFF Series

PUFF 1X4 Cloud Fixture



### DIFFUSER

One piece .170 smooth opal 100% acrylic for a fully luminous light source. Special concealed hinges allow lens to swing down from either side to facilitate relamping.

### TYPICAL OPTIONS AND ACCESSORIES

Whips, and lenses. See options page at the end of the T02SURF section, or contact factory for more details.

## FEATURES & SPECIFICATIONS

### INTENDED USE

A puff of light to illuminate the most discriminating office or home. A shallow contemporary opal acrylic diffuser softly and evenly distributes light at comfortable levels.

### SIZE W x L x H in inches (mm)

- 1x4: 11.75W x 50.5L x 6.0Dp
- 2x2: 26.5W x 26.5L x 6.0Dp
- 2x4: 26.5W x 50.5L x 6.0Dp
- 248L: 11.0W x 50.5L x 6.0Dp
- 424L: 17.0W x 26.5L x 6.0Dp
- 448L: 17.0W x 50.5L x 6.0Dp

### CONSTRUCTION

All metal parts die formed from heavy gauge cold roll steel housing spot welded to insure uniformity and dimensional stability.

## ORDERING INFORMATION

Example: PUF14LF32W3200LDMV40K

## PUFF 1X4

### STANDARD

PUF	14L	F32W3200L	DMV	40K
<b>Series</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	14L 1 x 4	<b>F32W3200L</b> 32 System Watts, 3200 Delivered Lumens <b>F48W4500L</b> 48 System Watts, 4500 Delivered Lumens <b>F57W5100L</b> 57 System Watts, 5100 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

### HIGH OUTPUT

PUF	14L	H72W6500L	DMV	40K
<b>Series</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	14L 1 x 4	<b>H72W6500L</b> 72 System Watts, 6500 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

\*Consult for more options



Texas Fluorescents  
 2055 Luna Rd. Suite 142 Carrollton, TX 75006  
 Phone: 972-247-3171 Fax: 972-247-0200  
 www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes:

# PUFF Series

## PUFF 2X2 Cloud Fixture



### ORDERING INFORMATION

Example: PUF22LF28W2550LDMV40K

### PUFF 2X2

#### STANDARD

PUF	22L	F28W2550L	DMV	40K
<b>Series</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	22L 2 x 2	<b>F24W2250L</b> 24 System Watts, 2250 Delivered Lumens  <b>F28W2550L</b> 28 System Watts, 2550 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire  <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

#### HIGH OUTPUT

PUF	22L	H36W3250L	DMV	40K
<b>Series</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	22L 2 x 2	<b>H36W3250L</b> 36 System Watts, 3250 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire  <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

\*Consult for more options



Catalog Number:
Notes:

# PUFF Series

PUFF 2X4 Cloud Fixture



## ORDERING INFORMATION

Example: PUF24LF32W3200LDMV40K

### PUFF 2X4

#### STANDARD

PUF	24L	F32W3200L	DMV	40K
<b>Series</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	24L 2 x 4	<b>F32W3200L</b> 32 System Watts, 3200 Delivered Lumens  <b>F48W4500L</b> 48 System Watts, 4500 Delivered Lumens  <b>F57W5100L</b> 57 System Watts, 5100 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire  <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

#### HIGH OUTPUT

PUF	24L	H72W6500L	DMV	40K
<b>Series</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	24L 2 x 4	<b>H72W6500L</b> 72 System Watts, 6500 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire  <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

\*Consult for more options



Catalog Number:
Notes:


# PUFF Series

Cloud Fixture



T E X A S

F L U O R E S C E N T S

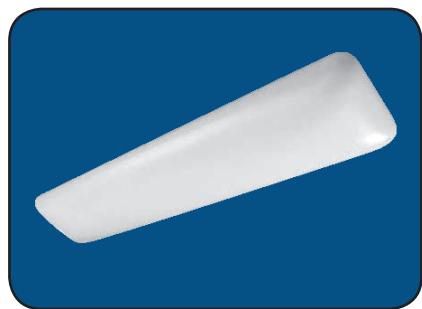

## ORDERING INFORMATION

Example: PUF448LF32W3200LDMV40K

### STANDARD

PUF	4	48L	F32W3200L	DMV	40K
<b>Series</b>	<b>Width</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	4 17.0	24L 26.5" 48L 50.5"	<b>F32W3200L</b> 32 System Watts, 3200 Delivered Lumens <b>F48W4500L</b> 48 System Watts, 4500 Delivered Lumens <b>F57W5100L</b> 57 System Watts, 5100 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

### HIGH OUTPUT

PUF	4	48L	H72W6500L	DMV	40K
<b>Series</b>	<b>Width</b>	<b>Size</b>	<b>Wattage and Lumen</b>	<b>Driver</b>	<b>Color Temperature</b>
PUF LED Cloud Fixture	2 11.0 4 17.0	48L 50.5"	<b>H72W6500L*</b> 72 System Watts, 6500 Delivered Lumens	<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

\*Consult for more options



Catalog Number:
Notes:

Texas Fluorescents  
 2055 Luna Rd. Suite 142 Carrollton, TX 75006  
 Phone: 972-247-3171 Fax: 972-247-0200  
 www.texasfluorescents.com email: sales@texasfluorescents.com


# PUFF Series

Cloud Fixture







T E X A S

F L U O R E S C E N T S

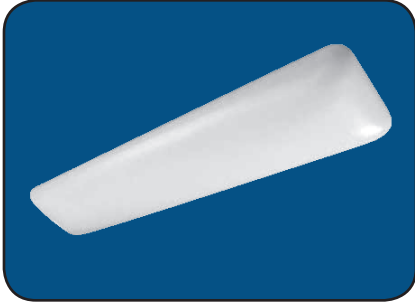

## DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

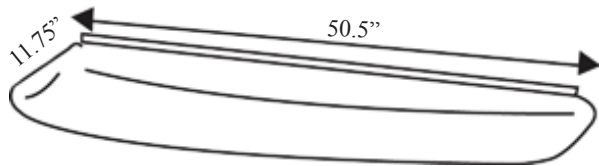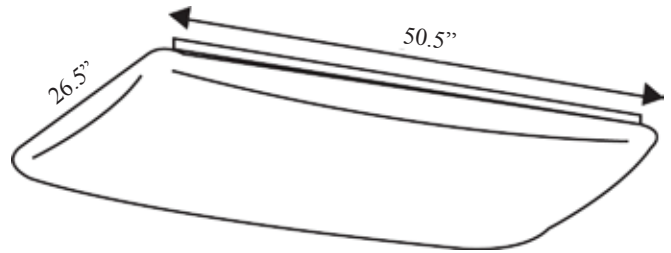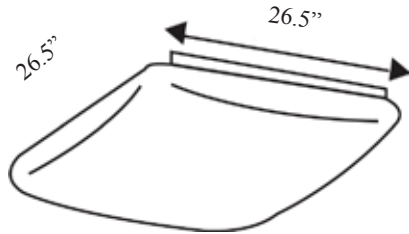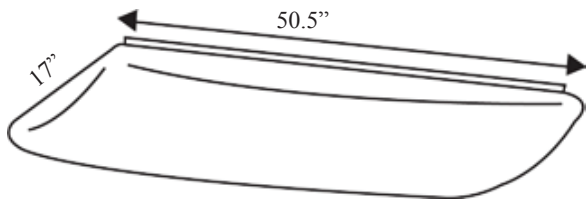

\*Consult for more options



Catalog Number:
Notes: