


SAL 2 x 2

Two Inch Parabolic T5

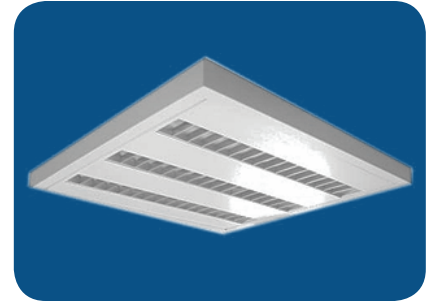

FEATURES & SPECIFICATIONS

INTENDED USE

Three light T5 parabolic provides high efficient lighting in less than two inches of depth. Recessed or surface mounting.

SIZE W x L x H in inches (mm)

23.7" x 23.7" x 1.78"

LAMP

3 lamp position.

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Choice of aluminum louver (SAL) or white steel blades (WSB).

- Unique aesthetic combines dedicated louvers with seamless perforated face
- Excellent glare control for spaces where computers are in use; RP-1 compliant
- 1.78" deep ultra-shallow housing frees up plenum space, fits into tight areas, and is easy to handle and install
- Ideal for 8'x8' and 8'x10' spacings
- T5 or T5 HO technology offers an exceptional lumen package
- Dedicated louvers create an optical envelope to provide maximum contribution from each lamp

MOUNTING

Recessed inverted T-Bar ceilings. Grid mount or Surface Mount

LISTING

Fixture and Ballast: UL Listed.
Ballast: Thermally protected, class P, HPF, Non PCB.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, whips, and lenses. See options page at the end of the T02Grid section, or contact factory for more details.

ORDERING INFORMATION

Example: SAL324E120

SAL		3		24		E120		
Series		Lamp Positions		Lamp Type [1]		Ballast & Voltage [1]		
SAL	T5 Parabolic	3	Lamps Not Included	14	22 in. T5	E120	Electronic, 120V	
WSB	T5 White Steel Blades			24	22 in. T5HO	E277	Electronic, 277V	
						MV	Electronic, Multivolt	
						H120 [2]	Electronic, Hi-Lume 120V	
						H277 [2]	Electronic, Hi-Lume 277V	
						HMV [2]	Electronic, Hi-Lume Multivolt	
						G120 [3]	Line Dimming, 120V	
						G277 [3]	Line Dimming, 277V	
						GMV [3]	Line or 0-10V dim, Multivolt	
						Options [1]		
						WP	6ft whip, 3/18ga	
						WP10	6ft whip, 4/18ga	
						EM	Emergency ballast	
						EM14	Emergency ballast, 1400Lumen	

EM14 ballast required for T5, TT5 & T5HO lamps

Notes

- [1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.
 [2] HiLume and multivolt dimming ballasts available for T8 lamps only.
 [3] Dimming ballasts available for T8 & T5HO lamps only.

Catalog Number:
Notes:



SAL 2 x 2

Two Inch Parabolic T5



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



Catalog Number:
Notes:

SAL 2 x 4

Two Inch Parabolic T5



FEATURES & SPECIFICATIONS

INTENDED USE

Three light T5 parabolic provides high efficient lighting in less than two inches of depth. Recessed or surface mounting.

SIZE W x L x H in inches (mm)

23.7" x 47.5" x 1.78"

LAMP

3 lamp position.

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Choice of aluminum louver (SAL) or white steel blades (WSB).

- Unique aesthetic combines dedicated louvers with seamless perforated face
- Excellent glare control for spaces where computers are in use; RP-1 compliant
- 1.78" deep ultra-shallow housing frees up plenum space, fits into tight areas, and is easy to handle and install
- Ideal for 8'x8' and 8'x10' spacings
- T5 or T5 HO technology offers an exceptional lumen package
- Dedicated louvers create an optical envelope to provide maximum contribution from each lamp

MOUNTING

Recessed inverted T-Bar ceilings. Grid mount or Surface Mount

LISTING

Fixture and Ballast: UL Listed.
Ballast: Thermally protected, class P, HPF, Non PCB.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, whips, and lenses. See options page at the end of the T02Grid section, or contact factory for more details.

ORDERING INFORMATION

Example: SAL354E120

SAL	3	54	E120		
Series		Lamp Type [1]		Ballast & Voltage [1]	
SAL	T5 Parabolic	28	46 in. T5	E120	Electronic, 120V
WSB	T5 White Steel Blades	54	46 in. T5HO	E277	Electronic, 277V
Lamp Positions				MV	Electronic, Multivolt
3				H120 [2]	Electronic, Hi-Lume 120V
Lamps Not Included				H277 [2]	Electronic, Hi-Lume 277V
				HMV [2]	Electronic, Hi-Lume Multivolt
				G120 [3]	Line Dimming, 120V
				G277 [3]	Line Dimming, 277V
				GMV [3]	Line or 0-10V dim, Multivolt
				Options [1]	
				WP	6ft whip, 3/18ga
				WP10	6ft whip, 4/18ga
				EM	Emergency ballast
				EM14	Emergency ballast, 1400Lumen

EM14 ballast required for T5, TT5 & T5HO lamps

Notes

- [1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.
[2] HiLume and multivolt dimming ballasts available for T8 lamps only.
[3] Dimming ballasts available for T8 & T5HO lamps only.

Catalog Number:

Notes:



SAL 2 x 4

Two Inch Parabolic T5



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



Catalog Number:
Notes: