

# SHPARA Series

Surface Mounted Parabolic with Shroud



## FEATURES & SPECIFICATIONS

### INTENDED USE

Mid level, specification grade, surface mounted, high performance, deep cell parabolic luminaire designed for maximum efficiency and visual comfort. Black reveal optional. Available in 2'x2', 2'x4', and 1'x4' configurations.

Available with various lamp and parabolic cell configurations.

### SIZE W x L x H in inches (mm)

1x4 - 11.75W x 48.0L x 5.0Dp

2x2 - 23.75W x 24.0L x 5.0Dp

2x4 - 23.75W x 48.0L x 5.0Dp

### LAMP

2, 3, or 4 lamp positions

### CONSTRUCTION

Die formed and spot welded, 22 gauge cold rolled steel housing assembly. Die formed, cold rolled steel reveal. Precision formed, anodized no. 603 semispecular aluminum, louver. Standard nominal 3" deep cell louvers are manufactured using interlocked construction and mitred corners. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. A protective film or bag is provided to protect the louver and fixture from construction dust. Louver hinges from either side. Latches use a positive locking cam action and come with matching finish.

### MOUNTING

Mounting holes are provided within offset to prevent distortion of housing when tightening mounting fasteners.

### OPTICS

Fixture & Ballast: UL Listed

Ballast: Thermally protected, class P, HPF, Non PCB

### TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, Hanging kit. Contact factory for additional options.

## ORDERING INFORMATION

Example: SHPARA18C432MV

SHPARA	18C	4	32	MV	
<b>Series</b>		<b>Lamp Count</b>		<b>Ballast &amp; Voltage [1]</b>	
SHPARA Surface Mounted Parabolic		2*, 3, or 4 Lamps Not included *For 1x4 version Add "-12" after lamping to designate size,		<b>X1</b> No ballast, wired for single end power <b>X2</b> No ballast, wired for double end power <b>MV</b> Electronic, Multivolt (120-277) <b>GMV</b> Multivolt 2 wire dimming      Multivolt <b>DMV</b> 0-10v 5wire dimming <b>HMV</b> Electronic, Multivolt, HBF (1.14 to 1.18)	
<b>Louver Cell Count &amp; Material [2]</b>			<b>Lamp Type [1]</b>		<b>Options [1]</b>
<b>8C</b>	8 cell (1x8 pattern) semi-specular, 1x4 fixture		<b>14</b>	22 in. T5	<b>C8515</b> 5-15P 120V 8ft. Cord & Plug <b>CS8L715</b> L7-15P 277V 8ft. Cord & Plug <b>C8</b> 8ft. Cord, No Plug <b>WP6</b> 6 ft. 3 wire, Whip <b>WP6-4W</b> 6 ft. 4 wire, Whip <b>EM</b> Emergency ballast, 500 lumens <b>EM14</b> Emergency ballast, 1400 lumens
<b>9C</b>	9 cell (3x3 pattern) semi-specular, 2x2 fixture		<b>17</b>	24 in. T8	
<b>12C</b>	12 cell (2x6 pattern) semi-specular, 2x4 fixture		<b>24</b>	22 in. T5HO	
<b>18C</b>	18 cell (3x6 pattern) semi-specular, 2x4 fixture		<b>32U</b>	24 in. T8 U-bend 6" leg	
<b>32C</b>	32 cell (4x8 pattern) semi-specular, 2x4 fixture		<b>28</b>	46 in. T5	
<b>24C</b>	24 cell (3x8 pattern) semi-specular, 2x4 fixture		<b>32</b>	48 in. T8	
<b>18F</b>	18 cell (3x6 pattern) full-specular, 2x4 fixture		<b>54</b>	46 in. T5HO	
<b>32F</b>	32 cell (4x8 pattern) full-specular, 2x4 fixture				
<b>18W</b> *1	18 cell (3x6 pattern) white, 2x4 fixture				
<b>32W</b> *1	32 cell (4x8 pattern) white, 2x4 fixture				

### Notes

[1] white louvers are 4" nominal depth

Note: EM14 required for T5HO lamps

Catalog Number:

Notes:

# SHPARA Series


Surface Mounted Parabolic with Shroud





## DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.


### SIDE VIEW

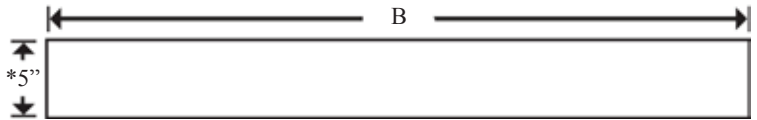


### TOP VIEWS

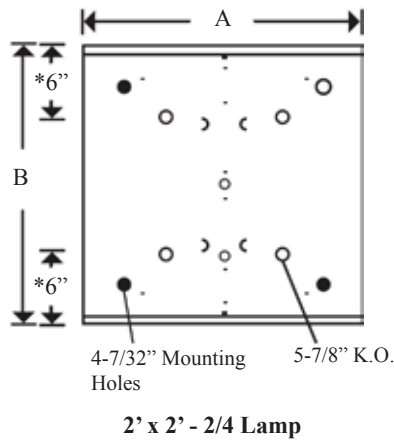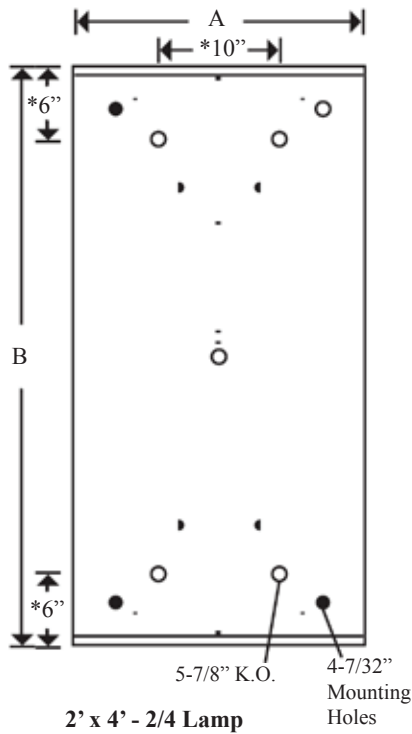


### SECTION VIEWS



1' x 4' - 2 Lamp




2' x 2' & 2' x 4' - 2 Lamp

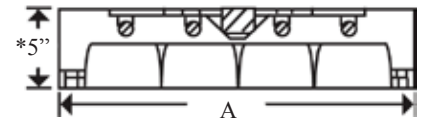

2' x 2' & 2' x 4' - 4 Lamp

### Candlepower Curve

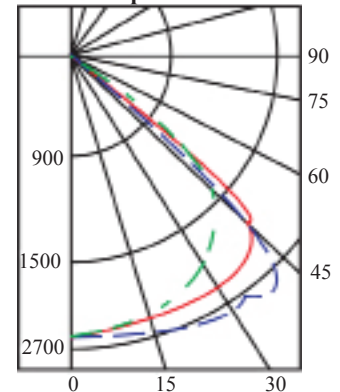

Model Configuration	A	B
1' x 4'	12"	48"
2' x 2'	24"	24"
2' x 4'	24"	48"

\* Housing Depth 5 1/2" Prior to Mid 2002.

Catalog Number:
Notes: