

ILLUMINATION

Ultra-bright, energy efficient, long-life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

Mounting hardware provided for back surface wall mount.

HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

OPTIONS


HTR: Optional internal heater for cold temperature applications.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations. (10°C – 40°C)



DIMENSIONS

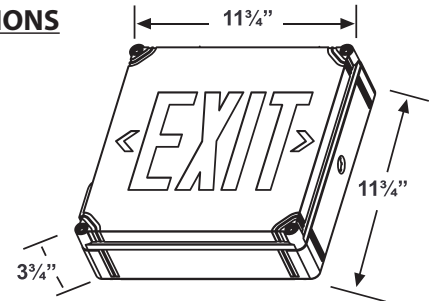

STANDARD



OPTIONAL



ORDERING INFORMATION

Most Popular model: WLEZXTE 2 R W EM (Double face, red letters, white housing, battery back-up)						
Model	Faces	Letter	Housing	Battery	Options	
WLEZXTE	1 Single	R Red	W White	Blank AC Only	SDT	Self-Diagnostic
	2 Double	G Green	B Black	EM Battry Back-Up	2C	Dual Dircuit
			G Grey			TP

Catalog Number:
Notes: