

WLTB Series

Recessed Wet Location
T-Bar Luminaire



FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, moisture resistant, recessed, lay-in T-Bar luminaire with framed door. For use in indoor applications and for outdoor canopies. Available in 2'x2', 2'x4', and 1'x4' configurations.

SIZE W x L x H in inches (mm)

1x4 = 11.75" x 47.75" x 48.0"

2x2 = 23.75" x 23.75" x 24.0"

2x4 = 23.75" x 47.75" x 48.0"

LAMP

2, 3, or 4 lamp positions.

MATERIALS & FEATURES

Die formed and spot welded, 20 gauge cold rolled steel housing assembly. Die formed, 20 gauge cold rolled steel door frame. Spot-welded for rigidity and clean appearance. Wiring access plate or flattened knock outs are provided on side of housing for connection to power supply. Ballast cover is mounted on one side of the fixture in order to provide uniform illumination and to avoid shadowing caused by dark reflective areas. Diffuser is held within a hinged frame door. Closed cell neoprene gasket ensures seal between door frame assembly and housing. Spring push clips retains the diffuser against the door frame. All fasteners to be plated or corrosion resistant. Captive nuts or equivalent to be used throughout. Back surface contains no holes.

FINISH

Powder painted high reflectance white housing components.

LISTING

Fixture & Ballast: UL Listed
Ballast: Thermally protected, class P, HPF, Non PCB, Wet Location Rated

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, whips, regressed doors, wire guards, and lenses. See options page at the end of the T02Grid section, or contact factory for more details.

ORDERING INFORMATION

Example: 128 A 232 E120

WLTB	A	2	32		E120		
Series		Lamp Position		Reflector [3]		Ballast & Voltage [1]	
WLTB Recessed Wet Location T-Bar Luminaire		2, 3, or 4 Lamps Not included		(blank) no reflector [3] M20 Mirrored reflector		E120 [4] Electronic, 120V E277 [4] Electronic, 277V MV [4] Electronic, Multivolt (120-277) H120 [4] Electronic, 120V, Hi-Lume H277 [4] Electronic, 277V, Hi-Lume HMV [4] Electronic, Multivolt, Hi-Lume L120 [5] Electronic, 120V, Lo-Lume L277 [5] Electronic, 277V, Lo-Lume LMV [5] Electronic, Multivolt, Lo-Lume G120 Line Dimming, 120 Volt G277 Line Dimming, 277 Volt GMV Line or 0-10V dimming, Multivolt	
Lens Material [2]		Lamp Type [1]					
A Prismatic Acrylic #12 Pattern A.125 Prismatic Acrylic #12 Pattern 1/8" MW Matte White Acrylic		40 48 in. T12 [7] 32 48 in. T8 28 46 in. T5 54 46 in. T5HO					
				Options [1]			
				WP 6 ft. 3 wire 18 gauge whip WP10 6 ft. 4 wire 18 gauge whip [3] EM Emergency ballast, 500 lumens [4] EM14 Emergency ballast, 1400 lumens [4]			

Notes

- [1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.
- [2] Custom louvers available in any cell configuration. Contact factory for additional information.
- [3] Custom reflectors available to create any light distribution.
- [4] HiLume and LoLume ballasts available for T8 lamps only.
- [5] Dimming ballasts available for T8 & T5HO lamps only.
- [6] Magnetic ballasts available for T8 & T12 only.
- [7] Magnetic & electronic T12 ballasts drive a 34W energy saver lamp.

EM14 ballast required for T5 & T5HO lamps

Catalog Number:

Notes:


WLTB Series

Recessed Wet Location
T-Bar Luminaire



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

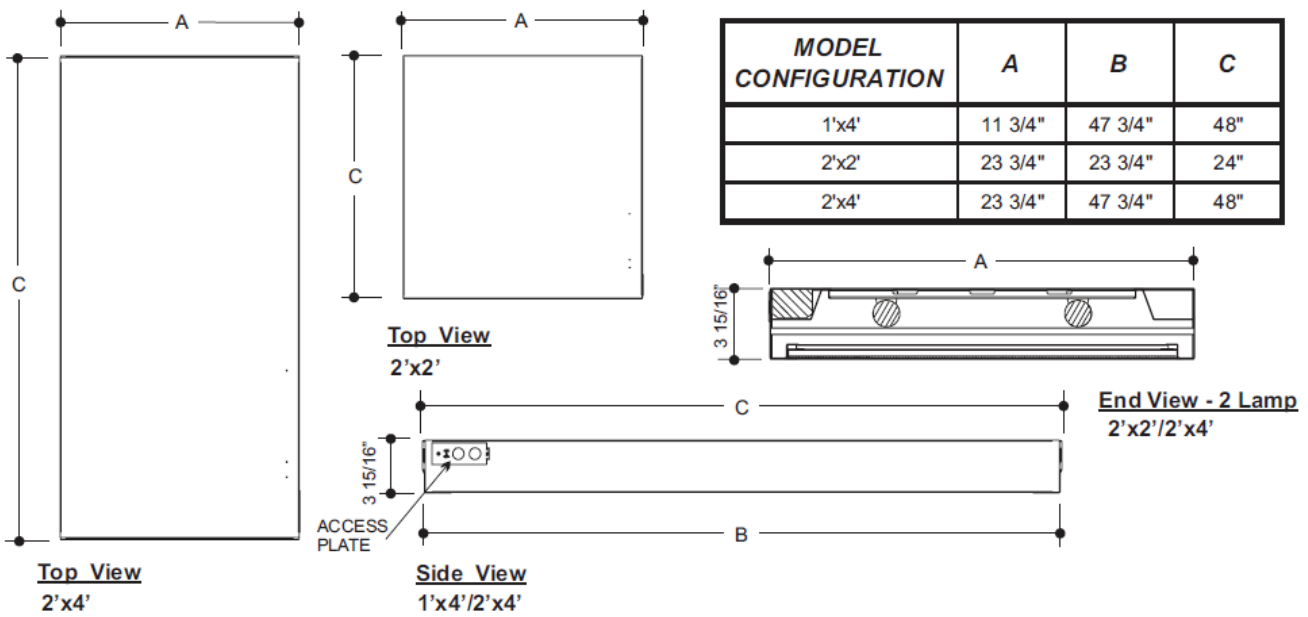

Catalog Number:
Notes: