


Commercial Fixture Series TOA

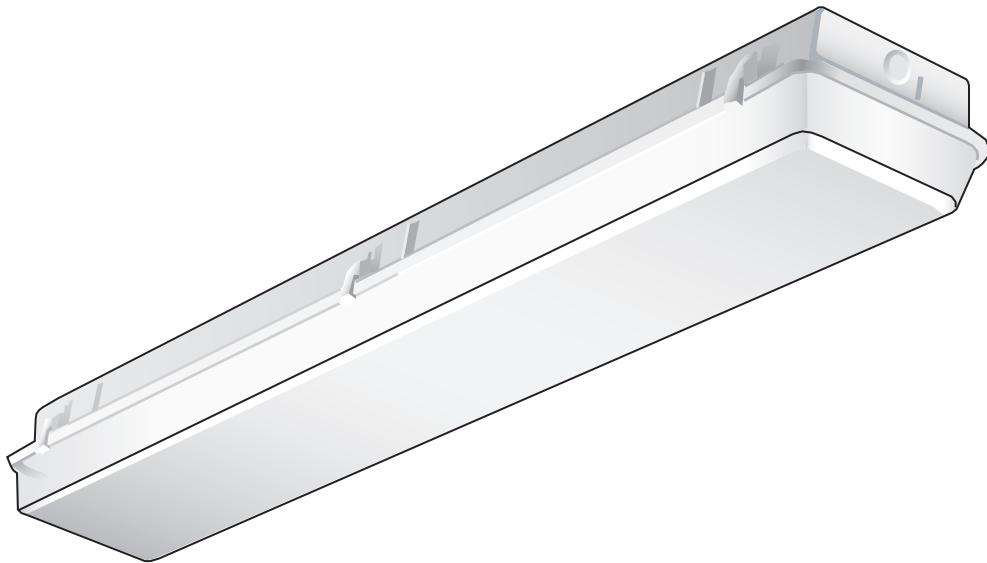

Application

The ideal fixture for unusual installations.

FEATURES & SPECIFICATIONS

Attributes

A corrosion proof fluorescent fixture designed for parking garages, food handling areas, cold storage and any application where bugs, vapors, moisture, and dirt are a problem.

Construction

Fixtures are constructed utilizing a fire retardant polyester fiberglass body with internal metal wiring compartment. The acrylic prismatic diffuser is clamped firmly to the housing with six trouble-free molded plastic latches. The unit is completely gasketed with a neoprene gasket continuously bonded to housing.

Options

Stainless steel latch with "keeper" (optional).
Latches can be tamper proof with #6 screw.

Mounting

Units may be surface or pendant mounted.

Electrical

All units to be wired with "P" ETL-CBM thermally-protected ballasts for 110 - 125 volt, 60 cycle, A. C. operation. Sockets to be pedestal type rotating lock bi-pin or spring loaded single pin as required. Units to bear U. L. labels.

Listing

Fixtures conform to Underwriters' Laboratories' standards for production and are carefully tested prior to packing.

(972) 247-3171

Factory/Warehouse • 2055 Luna Road • Suite 142 • Carrollton, TX 75006


(972) 247-3171 Phone • (972) 247-0200 Fax

Email sales@texasfluorescents.com

Look For Complete Internet Catalog • www.texasfluorescents.com

Commercial Fixture Series TOA


DIMENSIONS

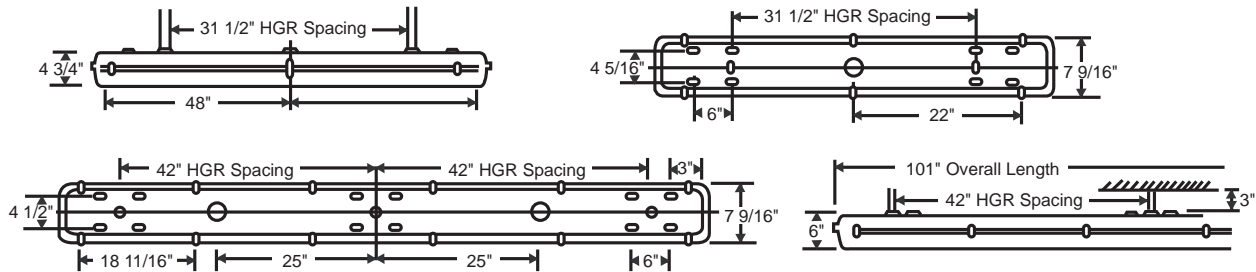

PHOTOMETRIC DATA

Coefficients of Utilization 2 - Light

RCR	RF	.30								
	RC	.80			.70			.50		
	RW	.50 .30 .10			.50 .30 .10			.50 .30 .10		
	1	.27	.22	.18	.26	.21	.18	.24	.20	.16
2	.35	.29	.24	.33	.28	.23	.30	.26	.21	
3	.41	.34	.30	.39	.33	.29	.35	.30	.27	
4	.45	.40	.35	.44	.38	.34	.39	.35	.31	
5	.51	.45	.41	.48	.43	.38	.43	.38	.35	
6	.56	.51	.46	.54	.48	.44	.47	.43	.39	
7	.61	.55	.50	.57	.52	.48	.50	.46	.42	
8	.64	.59	.54	.60	.55	.51	.52	.49	.46	
9	.68	.64	.59	.64	.59	.56	.56	.52	.50	
10	.71	.68	.64	.67	.63	.60	.58	.55	.53	



ORDERING INFORMATION

SERIES TOA			ELECTRONIC	
Part Number	Bulb	Size	Part Number	Bulb
TOA-254	2-F54T5HO	49-7/8" X 7-5/8" X 4-3/4"	TOA-232	2-F32T8
TOA-254-8	4-F54T5HO	97-7/8" X 7-5/8" X 6"	TOA-232-8	4-F32T8
TOA-296	2-F96T12	97-7/8" X 7-5/8" X 6"	TOA-296-T12ELB	2-F96T12
		97-7/8" X 7-5/8" X 6"	TOA-296-T8ELB	2-F96T8
TOA-296HO	2-F96T12HO	97-7/8" X 7-5/8" X 6"	TOA-296HO-T12ELB	2-F96T12HO
		97-7/8" X 7-5/8" X 6"	TOA-296HO-T8ELB	2-F96T8HO

TOA-240 and TOA-296 also available with Cold Weather Ballasts.

Add CW to end of part number. Example: TOA-240CW

(972) 247-3171

Factory/Warehouse • 2055 Luna Road • Suite 142 • Carrollton, TX 75006

(972) 247-3171 Phone • (972) 247-0200 Fax

Email sales@texasfluorescents.com

Look For Complete Internet Catalog • www.texasfluorescents.com