

42 High Bays stack neatly on a pallet without cartons for more efficient installation and less waste.


SHB - Stackable High Bay

Uniquely engineered High Bay not only provides premium performance with a full range of light outputs with special reflector spreads to accommodate 3, 4, 5 or 6 T5HO or T8 lamps but also is designed to be shipped without individual cartons. Specially designed "stackable locking device" ensures that the fixtures arrive at the job in perfect condition and then can be directly installed without wasting time opening and discarding packaging. A green solution that enhances productivity.

ITEM NO.	SIZE (L x W x H)	LAMPING
SHB332M23MV	48" x 13" x 3"	3-F32T8
SHB432M23MV	48" x 13" x 3"	4-F32T8
SHB532M23MV	48" x 17" x 3"	5-F32T8
SHB632M23MV	48" x 17" x 3"	6-F32T8
SHB354M23MV	48" x 13" x 3"	3-F54T5HO
SHB454M23MV	48" x 13" x 3"	4-F54T5HO
SHB554M23MV	48" x 17" x 3"	5-F54T5HO
SHB654M23MV	48" x 17" x 3"	6-F54T5HO

M23 - Mirrored wide distribution standard. M21 for narrow distribution or W13 for enhance white reflector.

[DOWNLOAD SPECIFICATION SHEET](#)

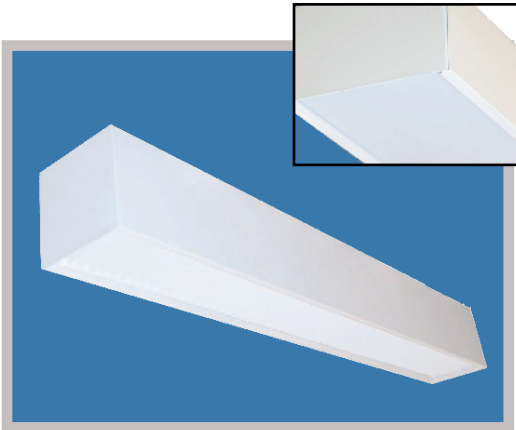

4x4 Direct or Indirect

Small is beautiful with this new sleeker 4x4 linear surface or pendant mounted fixture. Choice of direct or indirect lighting effect ideal for circulation spaces and open offices. Post painted in choice of finishes.



ITEM NO.	SIZE (L x W x H)	LAMPING
44SSP1232MVWH	48" x 4" x 4"	2-F32T8
44SSP1254MVWH	48" x 4" x 4"	2-F54T5HO
44SSP12328MVWH	96" x 4" x 4"	4-F32T8
44SSP12548MVWH	96" x 4" x 4"	4-F54T5HO

Choice of lighting distribution: S – Direct Only, SI – Indirect Only. Choose diffuser options: SP1-Specular Parabolic Louver 1/2" x 1/2" x 3.8".
MW – Matte White Lens. See pg 15 for lens choices.
Consult for other finishes.



Surface mount in a niche for great look and performance.

[DOWNLOAD SPECIFICATION SHEET](#)

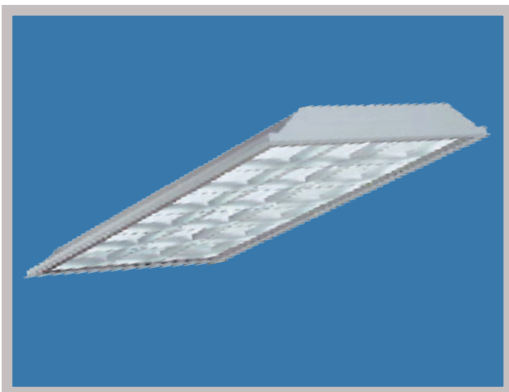

White louver provides broader light distribution and blends in better with most ceilings.

High Efficiency Parabolic

This high efficiency Parabolic uses a choice of 2" white or semi-specular louvers in a shallow body less than 4" deep. White louver version (PEW) is over 80% efficient and more efficient than semi-specular versions (PES). Available with optional reflector for enhanced efficiency and energy savings. Overlay lens available for softer output.

ITEM NO.	SIZE (L x W x H)	LAMPING
PEW6C217MV	22.75" x 22.65" x 3.7"	2-F17T8
PEW6C224MV	22.75" x 22.65" x 3.7"	2-F24T5HO
PEW6C217M23MV	22.75" x 22.65" x 3.7"	2-F17T8
PEW6C224M23MV	22.75" x 22.65" x 3.7"	2-F24T5HO
PEW12C232MV	46.75" x 22.65" x 3.7"	2-F32T8
PEW12C254MV	46.75" x 22.65" x 3.7"	2-F54T5HO
PEW12C232M23MV	46.75" x 22.65" x 3.7"	2-F32T8
PEW12C254M23MV	46.75" x 22.65" x 3.7"	2-F54T5HO
PEW18C332MV	46.75" x 22.65" x 3.7"	3-F32T8
PEW18C354MV	46.75" x 22.65" x 3.7"	3-F54T5HO

Add M23 for Polished Mirrored reflector for greater light output.
Change MV to LMV for Low ballast factor ballast to increase energy savings.

[DOWNLOAD SPECIFICATION SHEET](#)

[CLICK HERE for Additional Sales Information](#)

Surface Mounted High Efficiency Parabolic

Shallow surface mount with high reflectance white louver makes this fixture low in brightness yet gives a broad light distribution. Two light system with optional reflector and optional low power factor ballasts can provide energy savings of up to 44% over a typical 3 lamp parabolic.

ITEM NO.	SIZE (L x W x H)	LAMPING
WPS6C217MV	24" x 23.75" x 3.75"	2-F17T8
WPS6C224MV	24" x 23.75" x 3.75"	2-F24T5HO
WPS12C232MV	48" x 23.75" x 3.75"	2-F32T8
WPS12C254MV	48" x 23.75" x 3.75"	2-F54T5HO

Add M23 for Polished Mirror reflector for greater light output. Change MV to LMV for Low ballast factor ballast to increase energy savings.

[DOWNLOAD SPECIFICATION SHEET](#)

Low Profile T5 Surface Mount

Full body micro silhouette makes a bold statement with a minimal design in brushed nickel powder coated finish (consult factory for other finishes). Scaled to the T5 lamp the matte white diffuser surrounds the lamps for soft lighting. Brushed nickel fixture can be surface mounted on wall or ceiling or pendant mounted with specially engineering cable mounting kit.

ITEM NO.	SIZE (L x W)	LAMPING
DKS114MVBVN	24" x 2"	1 x F14T5
DKS121MVBVN	36" x 2"	1 x F21T5
DKS128MVBVN	48" x 2"	1 x F28T5
DKS214MVBVN	24" x 3"	2 x F14T5
DKS221MVBVN	36" x 3"	2 x F21T5
DKS228MVBVN	48" x 3"	2 x F28T5
DKS-HC501BN	5' CABLE MOUNTING KIT	

Change wattage codes to high output wattage.
Consult for other designer finishes.

[DOWNLOAD SPECIFICATION SHEET](#)

Contemporary Cloud

This squared edge cloud has long been the more expensive version of the softly rounded cloud. The CLM series now provides this sleek design at the more affordable price.

ITEM NO.	SIZE (L x W x H)	LAMPING
CLMMW232S	50" x 9.5" x 3.4"	2-F32T8
CLMMW432S	50" x 13.75" x 3.4"	4-F32T8

For commercial jobs, replace "S" with MV for commercial electronic ballast.

[DOWNLOAD SPECIFICATION SHEET](#)

SmartSense Series

Our popular 213 series versatile linear fluorescent fixtures are now available with integral ultrasonic occupancy sensor to sense motion within a space and automatically turn lights on even when the sensor has no direct line of sight to occupants. After the area is vacated and the time delay has elapsed, the sensors automatically turn the lights off.

ITEM NO.	SIZE (L x W x H)	LAMPING
SS213A232MV	48.25" x 4.3" x 4.5"	2-F32T8

For optional third light, add PL13 to end of item number. PL13 stays on all the time and the two F32T8 lights are on when occupied.

[DOWNLOAD SPECIFICATION SHEET](#)

Strip Retrofit Kit


The ERK kit provides easy transformation of a strip or industrial to a more energy efficient and improved lighting performance fixture. Reflector improves fixture efficiency and allows lower wattage. Retrofit standard and industrial 4' and 8' strip fixtures. The kit includes reflector / ballast cover, versatile socket brackets, sockets, TEK screws and Quarter Turns fasteners. Ballast and lamps are optional.

Standard Kits

ITEM NO.	SIZE (L x W x H)	LAMPING
ERK442232M23	48" x 8.75" x 4.4"	2-F32T8
ERK450232M23	48" x 8.75" x 4.4"	2-F32T8
ERK8422328M23	48" x 8.75" x 4.4"	4-F32T8
ERK8502328M23	48" x 8.75" x 4.4"	4-F32T8

For white reflector change M23 to W10.

[DOWNLOAD SPECIFICATION SHEET](#)

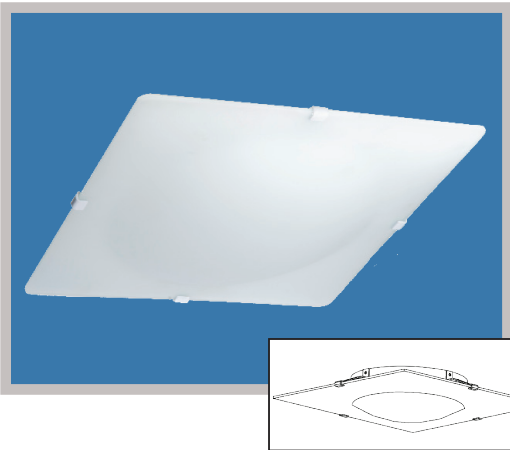

Floating Square

Dramatic glass diffuser with a slump round inside the square seems to float from the ceiling. Available in 18" or 24" square size with white hardware that blends into the glass.

ITEM NO.	SIZE (L x W x H)	LAMPING
HOTCQ18326E120	18" x 18" x 3.9"	3-26W Quad 4 Pin 4100 (INCL)
HOTCQ24326E120	24" x 24" x 3.9"	3-26W Quad 4 Pin 4100 (INCL)

Subtle white hardware holds the etched glass to the backplate.

[DOWNLOAD SPECIFICATION SHEET](#)

Security Wall Pack

- High impact polycarbonate lens and housing
- Rugged, heavy-duty, die-cast aluminum back plate
- Semi specular finished reflector
- Intelligence mounting template
- UL listed for Wet Location

ITEM NO.	SIZE (W x H x D)	LAMPING
DC052-70MH-120-LP	8.7" x 12.3" x 5.2"	70 Watt Metal Halide
DC052-70HPS-120-LP	8.7" x 12.3" x 5.2"	70 Watt High Pressure Sodium
DC052-100HPS-120-LP	8.7" x 12.3" x 5.2"	100 Watt High Pressure Sodium
DC052-2PL42-MV-LP	8.7" x 12.3" x 5.2"	(2) 42 Watt TTT- 4Pin

[DOWNLOAD SPECIFICATION SHEET](#)

Low Profile Wall Pack

- Heavy Duty Die Cast Aluminum Housing
- Bronze Powder-coat finish
- Optional photocell for easy field installation
- One Piece Anodized Aluminum Reflector
- Borosilicate glass lens with Hinged Door
- One Medium base lamp included

ITEM NO.	SIZE (W x H x D)	LAMPING
SM727-250HPS-MT-LP	6.75" x 11.87" x 5"	250 Watt High Pressure Sodium
SM727-400HPS-MT-LP	6.75" x 11.87" x 5"	400 Watt High Pressure Sodium
SM727-320PSMH-MT-LP	6.75" x 11.87" x 5"	320 Watt Pulse Start Metal Halide
SM727-400PSMH-MT-LP	6.75" x 11.87" x 5"	400 Watt Pulse Start Metal Halide

[DOWNLOAD SPECIFICATION SHEET](#)

Decorative Emergency Light

Decorative Emergency Light

- Low-profile, decorative die-cast, emergency fixture
- Standard bronze finish
- Integrated test switch/pilot light
- Polycarbonate lens and mirrored reflector for maximum illumination
- Two 6W Xenon lamps offer more light output than standard incandescent lamps
- Universal transformer for 120 or 277 VAC
- Automatic, low voltage disconnect (LVD)
- Designed for wall mount or conduit through the top
- Standard operating temperature 32°F to 122°F
- Self-diagnostic option available
- Remote version available
- Listed for Wet Location

Cat. # DEM-BZ* (Bronze)

*Change BZ to W for White, B for Black, or N for Nickel finish.

[DOWNLOAD SPECIFICATION SHEET](#)




Dimensions

LED Tape Light

LED Tapelight allows you to put light in the tightest space without tools, special wiring, or complicated installation. Simply peel 3M adhesive tape on back of each 18" tape and apply to the surface then plug in a driver and your done. Each LED is covered by epoxy to allow extra protection from the elements including water. You will have over 160 Luminous flex per 18 inches using less than 5 watts. Each 18" tapelight can be either joined to make a continuous run or joined with a 12" cable joiner to enable a single driver to power multiple strips.

The LED tapelight lasts up to 50,000 hours. If it is on 3 hours a day then it will highlight your space for the next 45 years. Choose from a selection of plug-in or hardwire drivers in different wattages to meet the needs of your specific application.

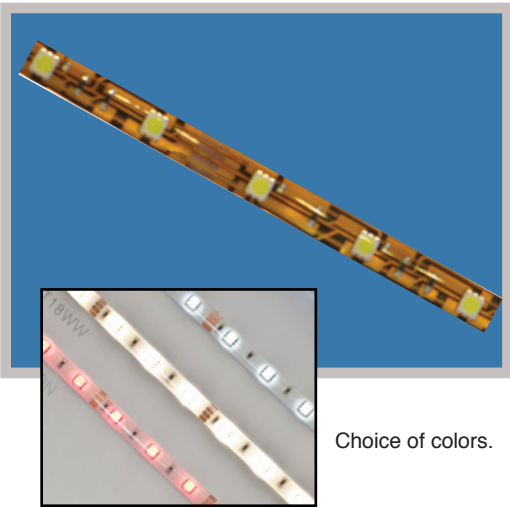

Choice of colors.



Installs easily with tape and adds drama to the scene. 10 ft tape available for runs.



LEDRGBCON

ITEM NO.	DESCRIPTION
LEDT18WW	4.5W - 18"L x .25"W - Warm White
LEDT18CW	4.5W - 18"L x .25"W - Cool White
LEDT10FTWW	27W - 120"L x .25"W - Warm White
LEDT10FTCW	27W - 120"L x .25"W - Cool White
LEDT18BL	4.5W - 18"L x .25"W - Blue
LEDT18YLW	4.5W - 18"L x .25"W - Yellow
LEDT18RGB	4.5W - 18"L x .25"W - Full Color
LEDTD48WPI	48 Watt capacity Plug-In Driver. Requires a LEDTDCPI connector.
LEDTD12WPI	12 Watt capacity Plug-In Driver. Requires a LEDTDCPI connector.
LEDTD10WDW	10 Watt capacity Hardwire Driver. Requires a LEDT6C connector.
LEDTD25WDW	25 Watt capacity Hardwire Driver. Requires a LEDT6C connector.
LEDTDCPI	12" cable connects tape to plug driver.
LEDTIC	Integral connector to join tape to tape or to connectors. (Each connection point requires one of these.)
LEDTICELBOW	"L" connector to join two tapes 90° angle.
LEDTICCROSS	"X" connector to join four tapes.
LEDTICTCONN	"T" connector to join three tapes.
LEDT6C	Joins two LED tapes up to 12" apart. Requires two LEDTIC.
LEDRFDIMMER	RF Dimmer module adjust brightness infinitely, wireless control.
LEDRGBCON	6-Key controller for RGB tape.

[DOWNLOAD SPECIFICATION SHEET](#)