


Wall Mount Series WPU

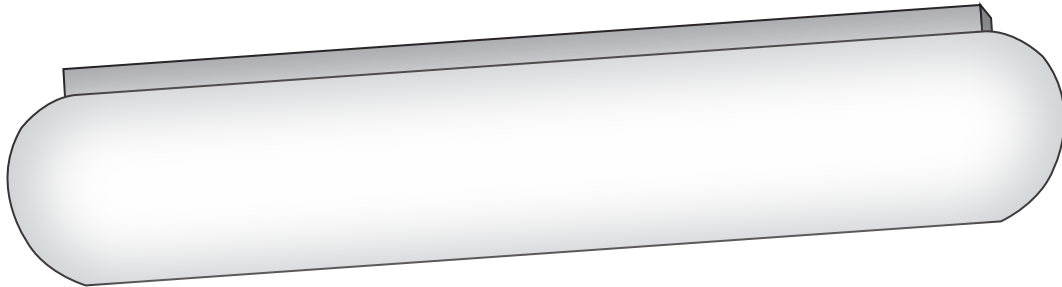

Application

The Reverse Bath Bar diffusers can be used with a standard 2-Lite strip fixture, to provide an economical, energy efficient, yet contemporary luminaire.

FEATURES & SPECIFICATIONS

Attributes

A shallow, fully luminous light source which seems to float on wall providing even light distribution.

Construction

All metal parts die formed from heavy gauge cold roll steel housing to insure uniformity and dimensional stability.

Diffuser

One piece 100% acrylic for a fully luminous light source.

Electrical

Unless otherwise specified, ballasts are rapid start, class "P" thermally protected, H.P.F., CBM-ETL. Optional ballasts available include: energy saving (ESB), electronic (ELB), dimming (DIM), low temperature (CW). Standard voltage on all fixtures is 120V 60HZ AC, or as specified. Sufficient knockouts are provided on the back for all connections and through wiring.

Listing

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.

(972) 247-3171

Factory/Warehouse • 2055 Luna Road • Suite 142 • Carrollton, TX 75006


(972) 247-3171 Phone • (972) 247-0200 Fax

Email sales@texasfluorecents.com

Look For Complete Internet Catalog • www.texasfluorecents.com

Wall Mount Series WPU

DIMENSIONS

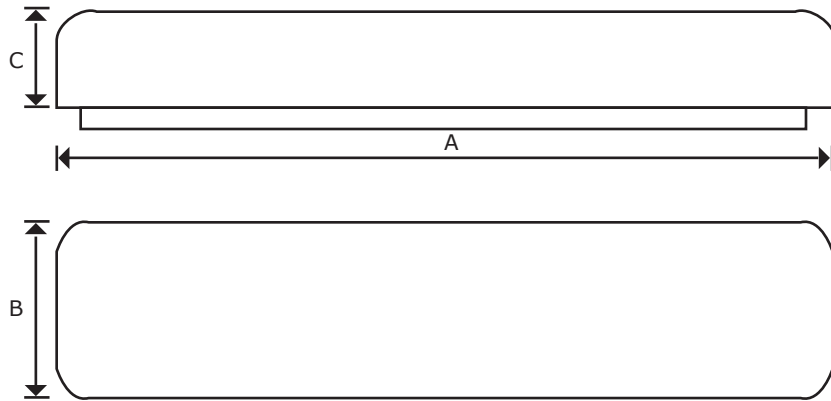

Series	A	B	C
WPU220	27"	6"	2-3/4"
WPU230	39"	6"	2-3/4"
WPU240	51"	6"	2-3/4"

ORDERING INFORMATION

SERIES WPU			ELECTRONIC	
Part Number	Bulb	Size	Part Number	Bulb
WPU-220	2-F20T12	27" X 6" X 2-3/4"	WPU-217	2-F17T8
WPU-230	2-F30T12	39" X 6" X 2-3/4"	WPU-225	2-F25T8
WPU-240	2-F40T12	51" X 6" X 2-3/4"	WPU-232	2-F32T8

(972) 247-3171

Factory/Warehouse • 2055 Luna Road • Suite 142 • Carrollton, TX 75006

(972) 247-3171 Phone • (972) 247-0200 Fax

Email sales@texasfluorescents.com

Look For Complete Internet Catalog • www.texasfluorescents.com