

# EZXTEU Series

LED Exit Sign



**STANDARD**

**OPTIONAL**



**ILLUMINATION**

- Ultra bright, energy efficient, long life Red or Green LED.

**ELECTRICAL**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**MOUNTING**

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

**HOUSING**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.
- Compact, low-profile design.


**OPTIONS**

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- cULus: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment.

**WARRANTY / LISTING**

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

**DIMENSIONS**

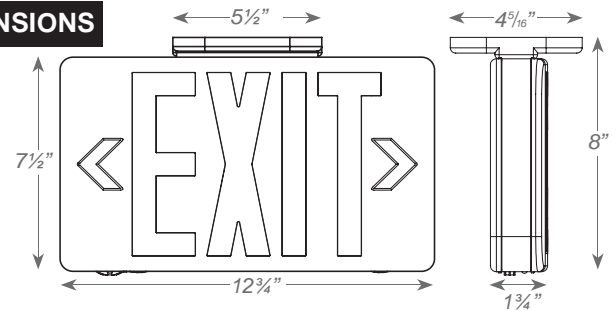

**ORDERING INFORMATION**

Sample Part Number: **EZXTEU-2-R-W-EM**

	MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.	EZXTEU	1	R Red	W White	Blank AC Only	SDT Self-diagnostics <sup>1</sup>
		2	G Green	B Black	EM Battery Backup	2C Dual circuit operation <sup>2</sup>
						Custom Custom wording
						USA Assembled in USA
						cULus cULus Listed

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units



# EZXTEU Series

LED Exit Sign

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZXTEU-RED/GREEN/EMI/2C/SDT	3.8	3.8	0.034	0.020

**Texas Fluorescents**

2055 Luna Rd., Suite 142 Carrollton, TX 75006  
 Phone: 972-247-3171 Fax: 972-247-0200\*  
 www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number
Notes: