

DLTB Series

Recessed Damp Location T-Bar Luminaire



FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, dust resistant, recessed, lay-in T-Bar luminaire with framed door. For use in indoor applications and for outdoor canopies.

Available in 2'x2', 2'x4', and 1'x4' configurations.

SIZE W x L x H in inches (mm)

1x4 - 11.75W x 47.75L x 3.94Dp

2x2 - 23.75W x 23.75L x 3.94Dp

2x4 - 23.75W x 47.75L x 3.94Dp

LAMP

1, 2, 3, 4, 5, or 6 lamp positions

CONSTRUCTION

Die formed and spot welded, 20 gauge cold rolled steel housing assembly. Die formed, 20 gauge cold rolled steel door frame. Spot-welded for rigidity and clean appearance. Wiring access plate or flattened knockouts are provided on side of housing for connection to power supply. Ballast cover is mounted on one side of the fixture in order to provide uniform illumination and to avoid shadowing caused by dark reflective areas. Diffuser is held within a hinged frame door. Closed cell neoprene gasket ensures seal between door frame assembly and housing Spring push clips retains the diffuser against the door frame. All fasteners to be plated or corrosion resistant. Captive nuts or equivalent to be used throughout. Back surface contains no holes.

MOUNTING

Lay-in type fixture for exposed grid type acoustical ceiling structure.

OPTICS


Standard diffuser is a clear, prismatic, pattern #12 extruded acrylic lens, designed for high efficiency and low glare illumination. (Lens may be mounted with smooth face down for better seal to door frame. Please specify.)

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.

ORDERING INFORMATION

Example: DLTBA24432MV

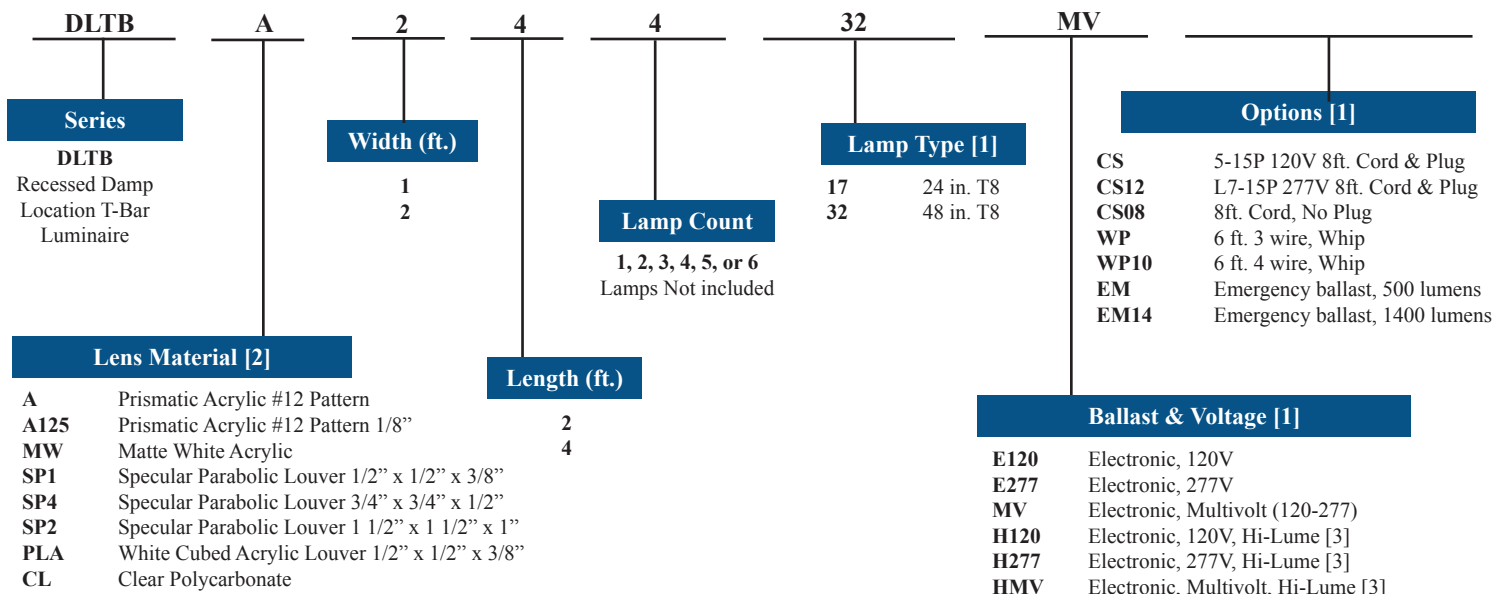

Notes

[1] See end of T02GRID for many additional lamps, ballasts, finishes, and options.

[2] Custom louvers available in any cell configuration. Consult factory for additional information.

[3] HiLume and LoLume ballasts available for T8 lamps only.

Note: EM14 required for T5HO lamps

Catalog Number:

Notes:


DLTB Series

Recessed Damp Location
T-Bar Luminaire




DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

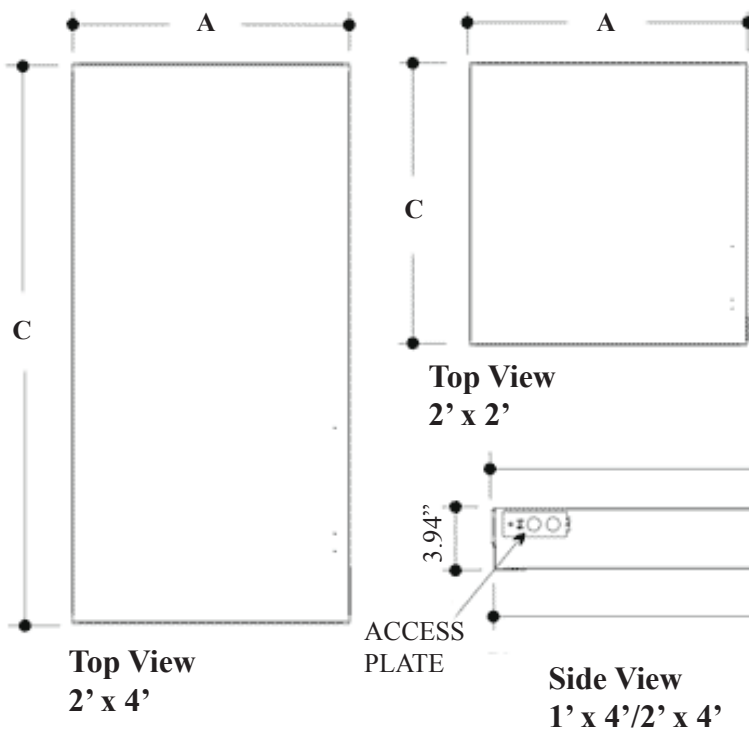

Model Configuration	A	B	C
1' x 4'	11.75	47.75	48"
2' x 2'	23.75	23.75	24"
2' x 4'	23.75	47.75	48"

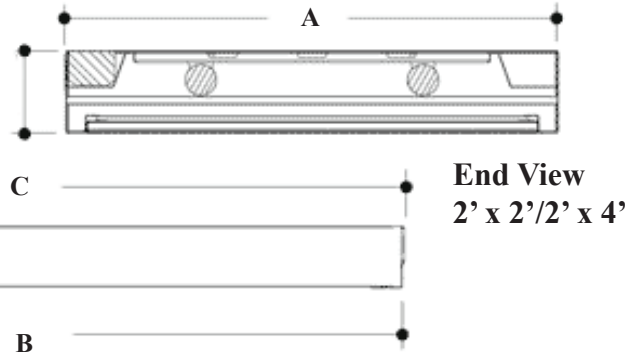

Catalog Number:
Notes: